



VKL076 Datasheet

19×4 LCD DRIVER

Rev.1.3

Intellectual Property Statement:

Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter referred to as “the Company”) owns legally registered intellectual property rights in both domestic and international jurisdictions. Any unauthorized use of the Company’s products or patented technologies by individuals or organizations is strictly prohibited.

The Company reserves the right to take legal action against any infringement, and to seek full compensation for damages or unlawful gains.

The Company’s name and trademarks are legally protected and may not be used or imitated without explicit written permission. No implied or express license shall be granted under any circumstances.

1 General Description

The VKL076 is a segment-type memory-mapped LCD driver that drive LCD screens with a maximum of 76 dots (19SEG×4COM). It can be configured via the I2C interface to set display parameters and access display data. It supports four selectable power modes and can also enter power-down mode by Display-OFF instruction. Its high noise immunity and ultra-low power consumption features make it suitable for water, electricity and gas meters as well as various industrial control instruments.

2 Key Features

- Operating voltage: 2.5-5.5V
- Built-in RC oscillator (default)
- Selectable LCD bias:1/2、 1/3
- Selectable LCD duty:1/4
- Built-in 19×4-bit display RAM
- The frame frequency can be configured as 80Hz or 71Hz、 64Hz、 53Hz
- Power-down mode via software command(LCD OFF)
- Supports four selectable power modes
- I2C communication interface
- Display mode 19×4
- Three display overall flicker frequencies
- Software-configurable LCD parameters
- Auto-increment addressing for sequential read/write
- VLCD pin provides LCD driving voltage(equal to VDD-VLCD)
- Built-in power-on reset circuit (POR)
- Low power consumption and high anti-interference
- Available Packages:
SSOP28(150mil)(9.9mm × 3.9mm PP=0.635mm)

3 Application field

- Panel watch
- Medical devices

4 Product Selection

Part No.	SEG/COM	Display points	Packaging
VKL060	15×4	60	SSOP24
VKL076	19×4	76	SSOP28
VKL092Q	23×4	92	QFN32L
VKL128	32×4	128	LQFP44
VKL144A	36×4	144	TSSOP48
VKL144B	36×4	144	QFN48L
VKL144C	36×4	144	LQFP48

5 Ordering Information


Part No.	Packaging	Tube Qty	Tray(reel) Qty	Box Qty	Total Qty	Notes
VKL060	SSOP24	50/tube		10000/box	100000 PCS	
VKL076	SSOP28	50/tube		10000/box	100000 PCS	
VKL092Q	QFN32L			3000/box	24000 PCS	
VKL128	LQFP44			1600/box	9600 PCS	
VKL144A	TSSOP48		2000/reel		16000 PCS	
VKL144B	QFN48L		3000/reel		24000 PCS	
VKL144C	LQFP48		250/tray	2500/box	15000 PCS	

6.1 VKL076/SSOP28 Pin Description

No.	Name	I/O	Function
1	GND	GND	Negative power supply
2	SCL	I	Serial Clock Input for I2C interface
3	SDA	I/O	Serial Data Input/Output for I2C interface
4-22	SEG11-SEG27	O	LCD SEG drive outputs
23-26	COM0-COM3	O	LCD COM drive outputs
27	VLCD	I	LCD driving voltage (equal to VDD-VLCD)
28	VDD	VDD	Positive power supply

7 Functional Description

7.1 Block Diagram

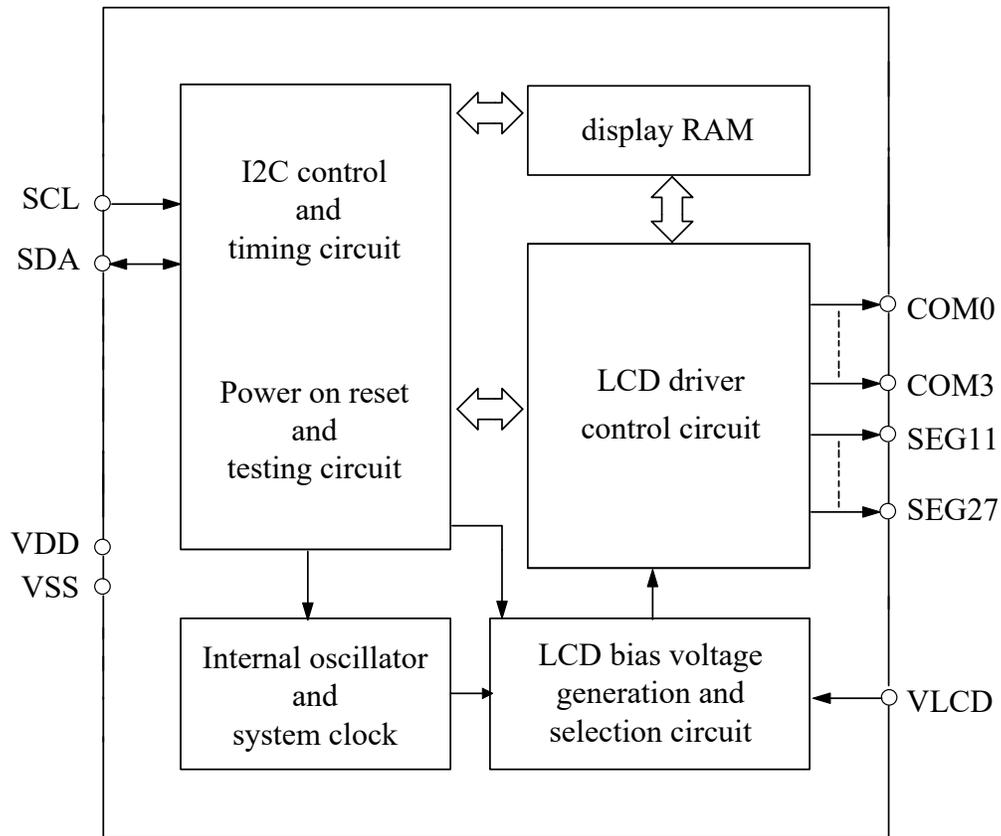

7.2 Display RAM


The display RAM is organized as 19×4 bits ($19\text{SEG} \times 4\text{COM}$), which stores the displayed data. The content of the display RAM is directly mapped to the display content of the LCD driver. Display RAM data is accessed via I2C commands. Address auto-increment each 4 bits data read/write.

The following is a mapping from the RAM to the LCD pattern:

Output	COM3	COM2	COM1	COM0	Address	Output	COM3	COM2	COM1	COM0	Address
SEG10	h	g	f	e	0x0A	SEG9	d	c	b	a	0x09
SEG12	p	o	n	m	0x0C	SEG11	l	k	j	i	0x0B
SEG14					0x0E	SEG13					0x0D
SEG16					0x10	SEG15					0x0F
SEG18					0x12	SEG17					0x11
SEG20					0x14	SEG19					0x13
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
						SEG27					0x1B
Data	bit7	bit6	bit5	bit4			bit3	bit2	bit1	bit0	

RAM Mapping of 19×4


Example: The correspondence between data SEG9-SEG12 and data a-p written into the display RAM is shown in the following figure:

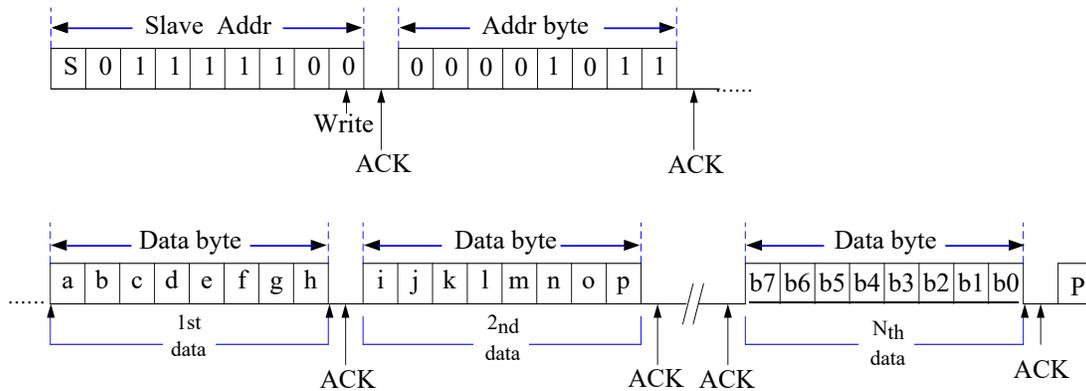

7.3 System Oscillator

The VKL076 system clock generates LCD driving signals and internal timing. The system clock source comes from the internal RC oscillator (32kHz), System clock frequency(f_{SYS}) Determine the LCD frame rate.



The setting of the system clock is shown in the following figure:



7.4 LCD driver voltage

LCD driving voltage ($V_{LCD} \leq V_{DD}$) is generated via resistor from VLCD to VSS. The LCD driving voltage = $V_{DD} - V_{LCD}$. An internal operational amplifier is used to achieve low-power driving.

Use a 1MΩ variable resistor(VR) to adjust contrast, retain the resistance value after optimization.

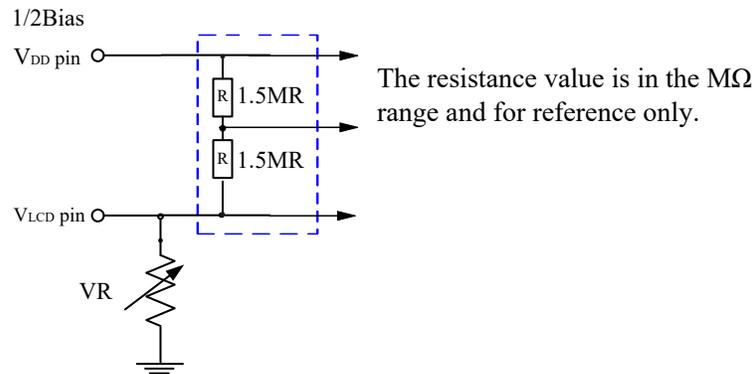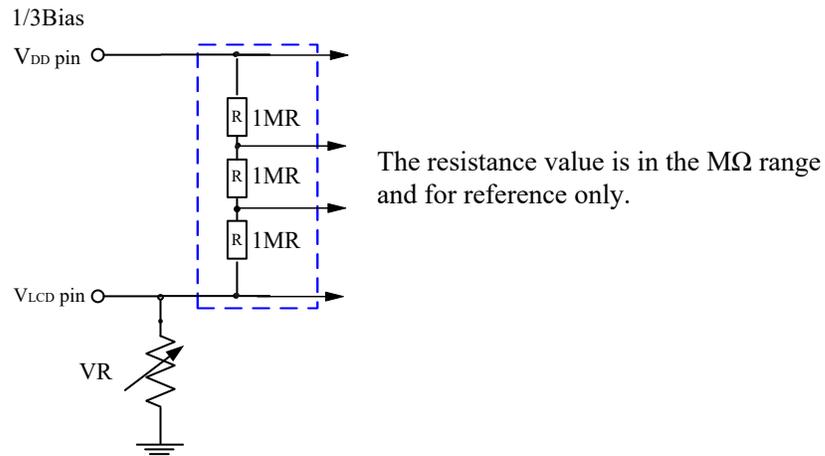

7.5 Power-On Reset


Do not initiate I2C communication during the 1mS power-on reset(POR) period.

The state of the internal circuit after initialization is as follows:

- When $V_{LCD} \leq V_{DD}$, all COM/SEG pins output VDD level..
- 1/4 duty and 1/3 bias.
- The system oscillator and LCD bias generator are turned off.
- LCD display off.
- Blinking function prohibited.

When powered on, the POR circuit ensures normal RESET inside the circuit. During the operation of the chip, if the VDD drops below the specified minimum operating voltage, the power-on reset timing condition must be met, that is, the VDD voltage must drop to 0V and remain at 0V for at least 100ms before rising to the normal operating voltage

Power-on Reset Timing:

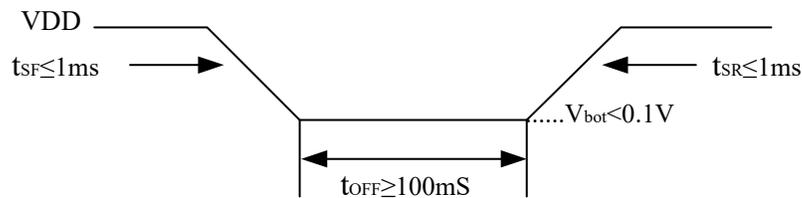

7.6 LCD Communication Command





The display mode supported by the LCD driver is 19SEG×4COM, with unused SEG and COM pins suspended. The LCD frame frequency is software selectable: 80Hz(default), 71Hz, 64Hz, 53Hz.

Display parameters and display data can be Configured and accessed through the I2C interface.

7.7 I2C Serial Interface

The VKL076 communicates via two I2C-compatible pins: SCL and SDA. These open-drain pins require external pull-up resistors.


The SCL pin is the clock input pin, and the SDA pin is the serial data input/output pin. Both SCL and SDA remain at logic high level when the I2C bus is idle.

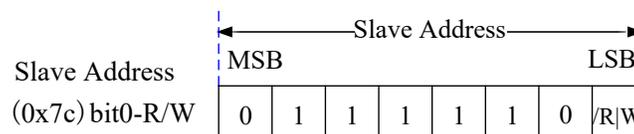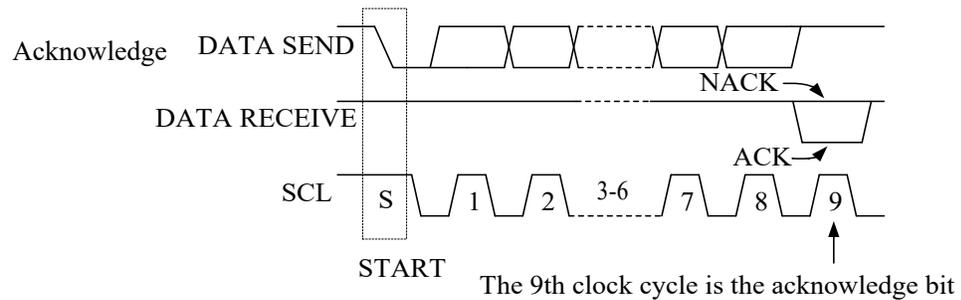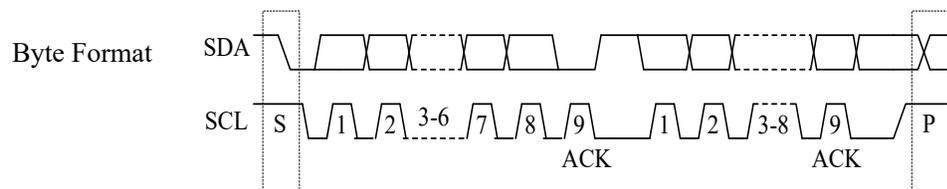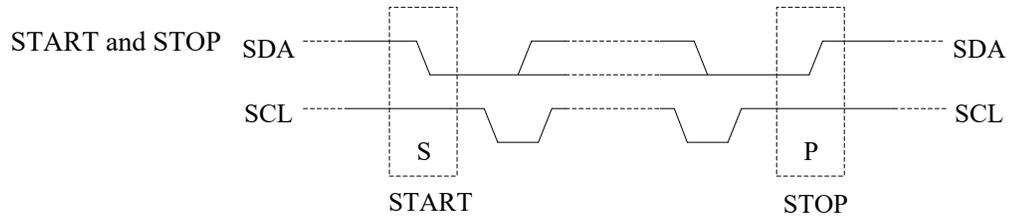


7.8 I2C Command Format

Write operation


Write commands

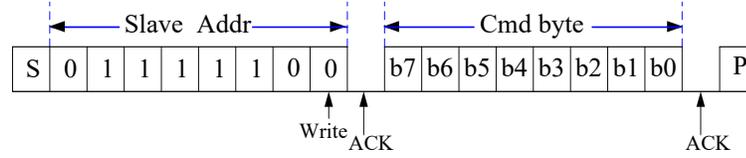

Write a single byte to the display RAM

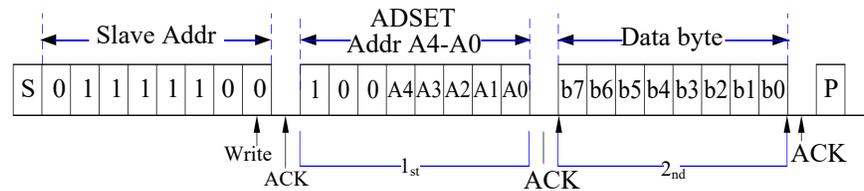


Write multiple bytes to the display RAM

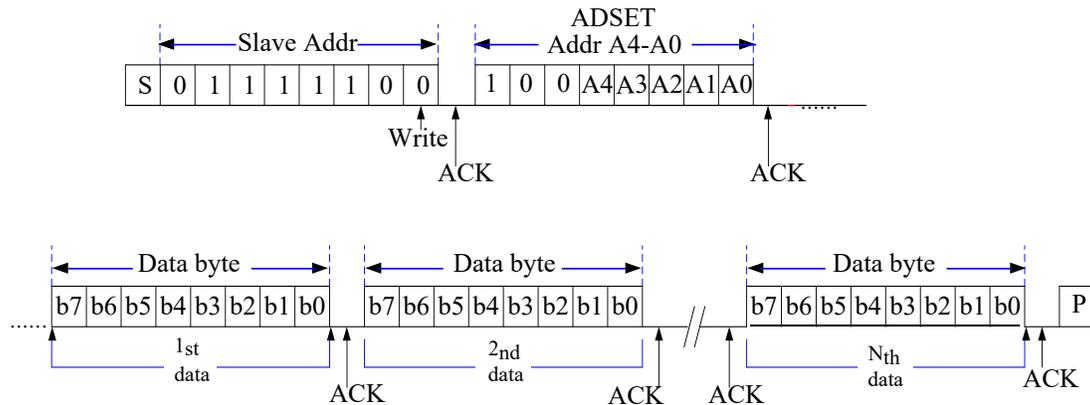


Read operation

Read multiple bytes from the display RAM

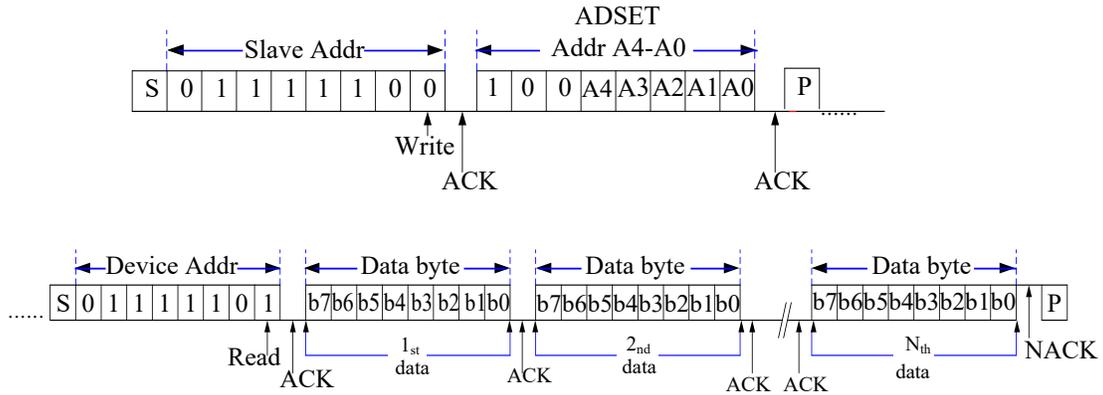

7.9 Command Summary

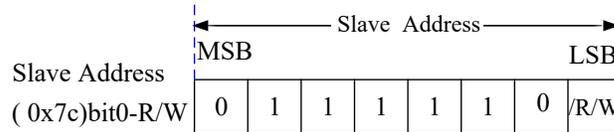

Bit7 determines the following byte type: 0=Data(D), 1= Command(C)

7.10 Display Mode Command

Set Display mode:

Function	Byte	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Note	R/W	Def
Address pointer	1	C/D	1	0	X	E	M0	X	X		W	

Bit3	LCD display
E	
0	OFF (Def)
1	ON

Bit2	LCD Bias
M0	
0	1/3 bias (Def)
1	1/2 bias

7.11 System Settings Commands

Set system parameters:

Function	Byte	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit 0	Note	R/W	Def
Address pointer	1	C/D	1	1	0	1	0	R	0		W	

Bit1	
R	Soft reset
0	Not Execute(Def)
1	Execute Soft reset

7.12 Address setting command

Set the start address for display RAM access

Function	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	R/W	Def
Address pointer	1	C/D	0	0	A4	A3	A2	A1	A0	W	

Bit4-0	Address(bit4-0)
A4-A0	
00000	0x09
01010	0x0A
01011	0x0B
.....
11011	0x1B

7.13 All-pixel on/off command

Set the global pixel display state of the LCD:

Function	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Note	R/W	Def
Address pointer	1	C/D	1	1	1	1	1	AP1	AP0		W	

Bit 1	Bit 0	All-pixel on/off control
AP1	AP0	
0	0	Normal(Def)
0	1	All-pixel off
1	0	All-pixel on
1	1	All-pixel off

- Note: 1. This command does not alter display RAM contents
 2. This command is effective only when LCD display on

7.14 Blinking frequency setting command

Set blinking frequency of the LCD

Function	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Note	R/W	Def
blinking frequency setting	1	C/D	1	1	1	0	0	BK1	BK0		W	

Bit 1	Bit 0	Blinking frequency
BK1	BK0	
0	0	Blinking off (Def)
0	1	0.5Hz
1	0	1Hz
1	1	2Hz

7.15 Display control command

Set LCD driver mode, frame frequency and four power modes

Function	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Note	R/W	Def
Display control Settings	1	C/D	0	1	FR1	FR0	DM	SR1	SR0		W	

Bit 4	Bit 3	Frame frequency	Bit2	Driving mode
FR1	FR0		DM	
0	0	80Hz (Def)	0	Line inversion (Def)
0	1	71Hz	1	Frame inversion
1	0	64Hz		
1	1	53Hz		

Bit1	Bit0	Power mode	Power consumption
SR1	SR0		
0	0	Lower Power mode 1 (LP1)	x0.5
0	1	Lower Power mode 2 (LP2)	0.67
1	0	Normal mode (NP)(Def)	1.0
1	1	High Performance mode(HP)	1.8

Operating current:

1.80 Hz 71 Hz >> 64 Hz > 53 Hz

2. Line inversion>Frame invers

3. High Performance mode > Normal Mode > Lower Power mode 2> Lower Power mod

4. Power consumption may vary depending on the LCD characteristics; values are reference only

Different display control commands have different display effects, as shown in the following table:


Display control	Visual stability	Display effect/contrast
Frame frequency	V	---
Driving mode	V	V
Power consumption mode	---	V
The impact is not absolute and is also related to the LCD used.		

8 Command Application

8.1 Initialize sequence

When powering on, the power-on reset sequence must be met. After power-on, parameters need to be configured first.

The initial parameters are configured through a series of commands, and the command sequence is as follows:

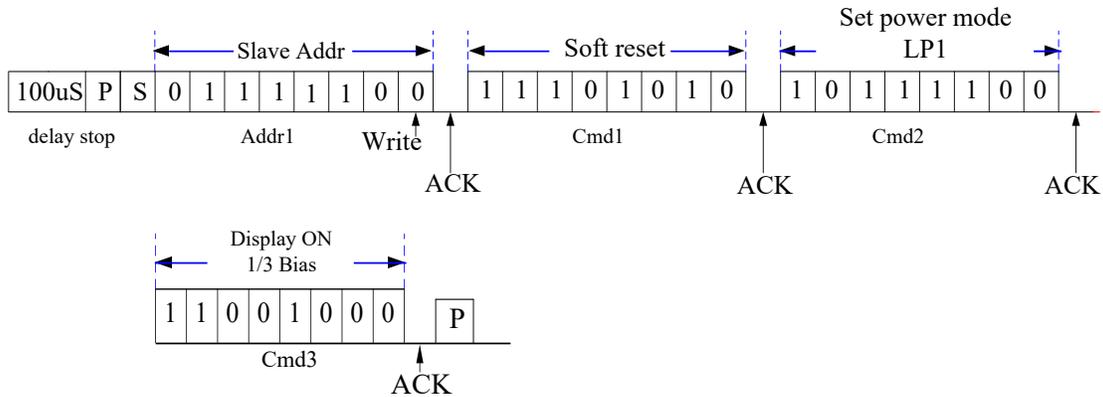

Power on: Ensure compliance POR timing requirements

Delay: Wait for the chip initialization with a delay of 100 microseconds

STOP: Send the I2C stop signal

START: Send the I2C start signal

Addr1: Send the Slave address (0x7c)

Cmd1: System Settings Command - Set Soft Reset (0xEA)


Cmd2: Data read, write, display and control commands - Set according to customer needs,
 e.g., Configure power mode: LP1(0xBC)
 example, set to the most power-saving mode (0xBC)

Cmd3: Mode setting command - set Display state and Bias.
 e.g., Display ON and SET 1/3 BIAS (0xC8)

STOP: Send the I2C stop signal

8.2 Send display data

When the display control is initialized, it has been configured and there is no need to change the blinking configuration. Only the display data needs to be sent.

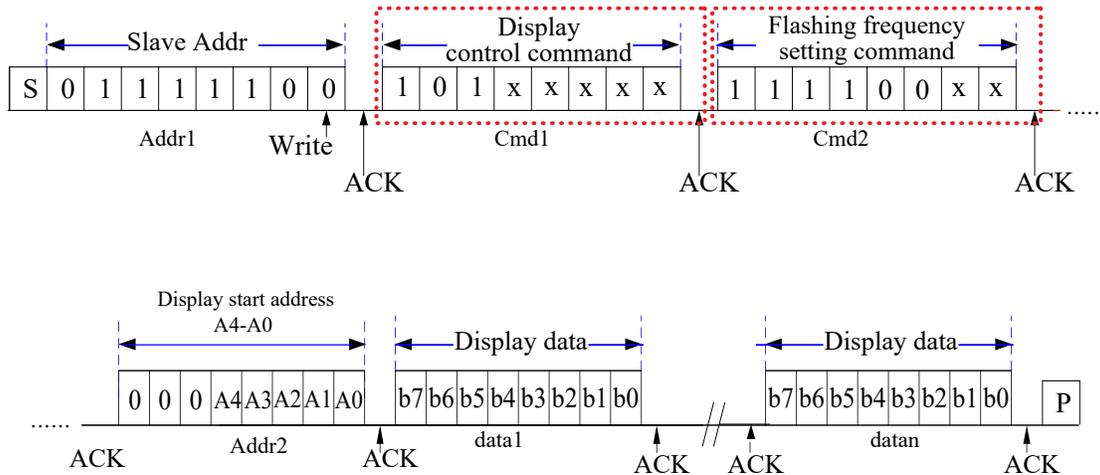

START: Send the I2C start signal

Addr1: Send the Slave address (0x7c)

Cmd1: Display control command - Set as needed. If the display control does not need to be changed, this byte does not have to be sent


Cmd2: blinking frequency setting command - Set as needed. If the flicker does not need to be changed, this byte does not have to be sent

Addr2: Address setting command - Set the display RAM starting address (0x0B)

Data1-Datan: Send the display data to the starting address and subsequent address of the set display RAM (up to 8 bytes)

STOP: Send the I2C stop signal

8.3 Read the display data

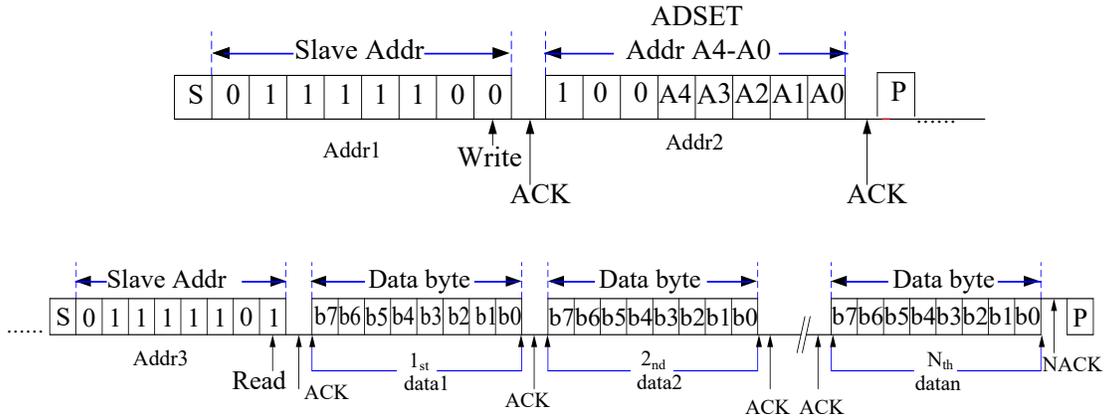

START: Send the I2C start signal

Addr1: Send the Slave address (0x7c)

Addr2: Address setting command - Set the display RAM starting address (0x0B)

STOP: Send the I2C stop signal

START: Send the I2C start signal


Addr3 : Send the Slave address (0x7d bit1=1 read)

Data1-Datan: Read data from display RAM

STOP: Send the I2C stop signal

8.4 Display Off

Other commands can also be sent in this format.

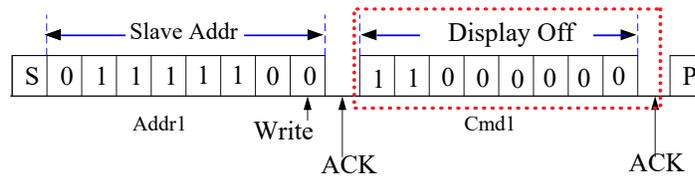

START: Send the I2C start signal

Addr1: Send the Slave address (0x7c)

Cmd1: Mode setting command - Display Off (0xC0)

STOP: Send the I2C stop signal

10 Electrical Characteristics

10.1 Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Supply voltage	VDD	-0.3~6.5	V
Input Voltage	VIN	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Storage Temperature	T _{STG}	-50~+125	°C
Operating Temperature	T _{OTG}	-40~+85	°C

10.2 DC Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	
						VDD	Conditions
Operating voltage	VDD	2.5	—	5.5	V	—	—
Operating current	I _{DD1}	—	7.5	20	μA	3V	VDD=3.3V, 25°C, 1/3 BIAS Power-saving Mode 1(LP1) FRAME rate 80Hz, FRAME flip.
Standby Current	I _{STB}	—	0.5	5	μA	3V	LCD display off Internal RC oscillator off.
VLCD pin voltage*1	VLCD	0	—	VDD-2.4	V	2.5V-5.5V	VDD-VLCD>=2.5V
Low-level Input	V _{IL}	0	—	0.3	VDD	3V 5V	SCL, SDA
High-level Input	V _{IH}	0.8	—	1.0	VDD	3V 5V	SCL, SDA
"L" input current	I _{IL}	-1	—	—	μA	3V	—
"H" input current	I _{IH}	—	—	1	μA	3V	—
LCD ON resistor	R _{ON}	—	3	—	kΩ	3V	I _{load} =±10uA

*1 LCD voltage=VDD-VLCD

10.3 AC Electrical Characteristics


Frame Frequency

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	
						VDD	Conditions
LCD 帧频频率	f_{LCD1}	56	80	104	Hz	3.3V	Frame rate 80Hz,-40 ~ +85°C
LCD 帧频频率	f_{LCD2}	49	71	93	Hz	3.3V	Frame rate 71Hz,-40 ~ +85°C
LCD 帧频频率	f_{LCD3}	44	64	84	Hz	3.3V	Frame rate 64Hz,-40 ~ +85°C
LCD 帧频频率	f_{LCD4}	37	53	69	Hz	3.3V	Frame rate 53Hz,-40 ~ +85°C

I2C parameter


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	
						VDD	Conditions
Clock Frequency	f_{SCL}	—	—	400	kHz	3.0-5.5V	—
Bus Free Time	t_{BUF}	1.3	—	—	μ s	3.0-5.5V	Time in which the bus must be free before a new transmission can start
Start Condition Hold Time	$t_{HD:STA}$	0.6	—	—	μ s	3.0-5.5V	After this period, the first clock pulse is generated
SCL Low Time	t_{LOW}	1.3	—	—	μ s	3.0-5.5V	—
SCL High Time	t_{HIGH}	0.6	—	—	μ s	3.0-5.5V	—
Start Condition Setup Time	$t_{SU:STA}$	0.6	—	—	μ s	3.0-5.5V	Only relevant for repeated START condition
Data Hold Time	$t_{HD:DAT}$	0	—	—	ns	3.0-5.5V	—
Data Setup Time	$t_{SU:DAT}$	100	—	—	ns	3.0-5.5V	—
SDA and SCL Rising Time	t_R	—	—	0.3	μ s	3.0-5.5V	periodically sampled
SDA and SCL Falling Time	t_F	—	—	0.3	μ s	3.0-5.5V	periodically sampled
Stop Condition Setup Time	$t_{SU:STO}$	0.6	—	—	μ s	3.0-5.5V	—
Output Valid from Clock	t_{AA}	—	—	0.9	μ s	3.0-5.5V	—
Input Filter Time Constant (SDA and SCL pin)	t_{SP}	—	—	50	ns	3.0-5.5V	Noise suppression time

I²C Timing

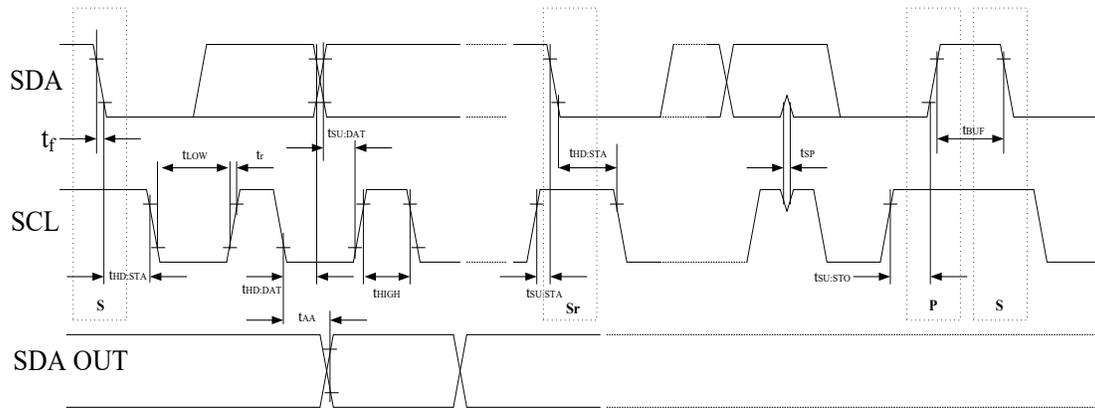

11 Package Information

11.1 SSOP28(150mil) (9.9mm × 3.9mm PP=0.635mm)

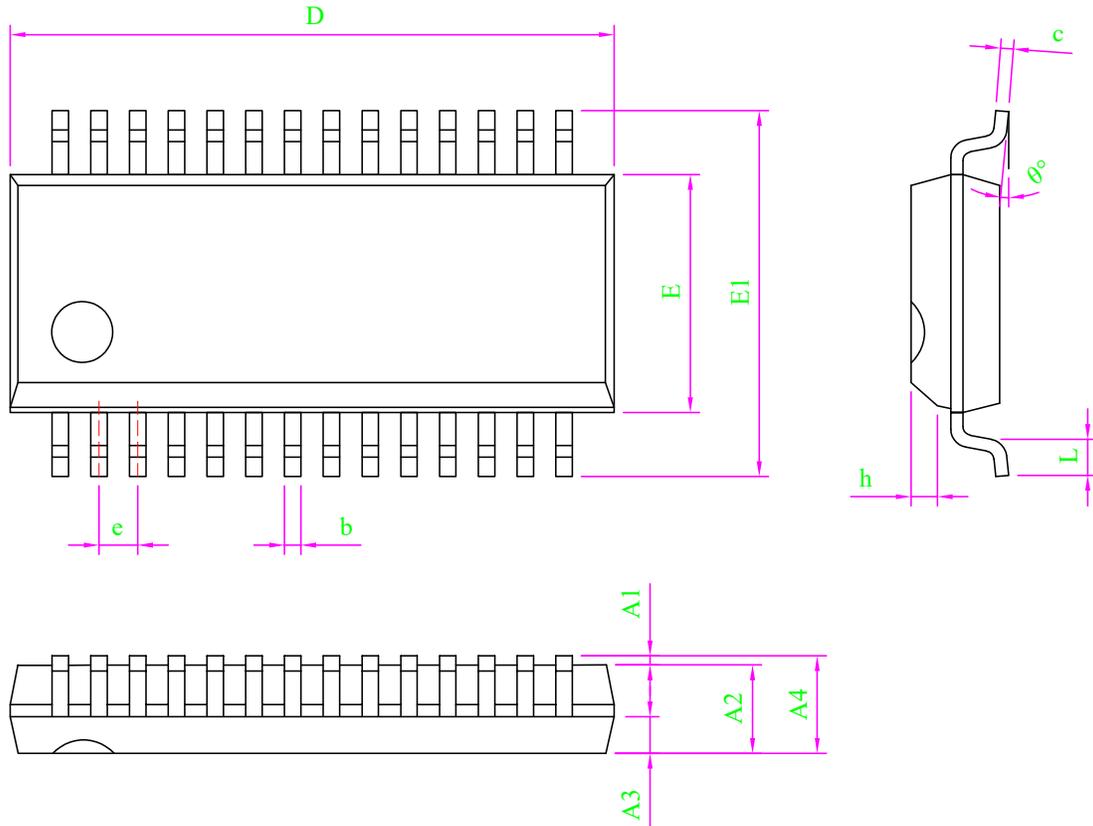

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	-	-	1.75
A1	0.05	-	0.23
A2	1.35	1.45	1.55
A3	0.60	0.65	0.70
b	0.23	-	0.31
c	0.19	-	0.25
D	9.80	9.90	10.00
E	3.90	3.90	4.00
E1	5.80	6.00	6.20
e	0.635 BSC		
h	0.30	-	0.50
L	0.60	-	0.80
θ	0	-	8°

12 Disclaimer

Warranty and liability — The information provided in this document is believed to be accurate and reliable. However, Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter “the Company”) makes no warranties, express or implied, as to the completeness or suitability of this information for any specific purpose.

In no event shall the Company be liable for any indirect, incidental, or consequential damages, including but not limited to loss of profits, equipment damage, or system failure, arising out of the use of this product or documentation, regardless of the legal theory under which such liability is asserted.

Right to change — The Company reserves the right to modify any information contained herein without prior notice. The latest version of this document is available at:

<https://www.szvinka.com/>

Applicability — This product is not designed or intended for use in life-critical, medical, or safety systems where failure could result in injury or death. The customer shall assume full responsibility for any such use.

Application — All product application descriptions provided herein are intended for illustrative purposes only. The Company makes no representations or warranties, express or implied, regarding the suitability of any specific application without further testing or modification.

The customer is solely responsible for determining whether the Company’s products are appropriate for their intended applications or end customers.

The customer shall ensure proper design practices, implementation safeguards, and operational validation to minimize risks associated with product use.

The Company shall not be held liable for any defects, losses, costs, or damages arising from weaknesses or failures in the customer’s own products or applications, or from the integration or use of third-party products.

Furthermore, the customer shall conduct all necessary testing and validation for any third-party deployment of the Company’s products to avoid potential misuse or associated damages. The Company assumes no liability in this regard.

Commercial terms of sale — Unless otherwise agreed in writing, sales of this product are subject to the Company’s standard terms and conditions of sale. The Company expressly rejects the applicability of the customer’s general terms and conditions.

Export control — This product may be subject to applicable export control regulations. The customer is solely responsible for compliance with such regulations, including obtaining any necessary export licenses.

13 Revision History

No.	Version	Date	Modify the content	Check
1	1.0	2018-08-10	Initial release	YES
2	1.1	2018-10-11	Add reference circuit	YES
3	1.2	2019-03-21	Alignment correction	YES
4	1.3	2025-08-09	Change Description	YES

[1] Please refer to the latest version of this document before starting or finalizing any design.

[2] Since the release of this document, the status or availability of this product may have changed. For the most up-to-date information, please visit:

<https://www.szvinka.com/>