



VK71XX-1 Datasheet

100mA Low Dropout LDO

Rev.1.1

Intellectual Property Statement:

Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter referred to as “the Company”) owns legally registered intellectual property rights in both domestic and international jurisdictions. Any unauthorized use of the Company’s products or patented technologies by individuals or organizations is strictly prohibited.

The Company reserves the right to take legal action against any infringement, and to seek full compensation for damages or unlawful gains.

The Company’s name and trademarks are legally protected and may not be used or imitated without explicit written permission. No implied or express license shall be granted under any circumstances.

1 General Description

VK71XX-1 is a low-dropout linear regulator that adopts CMOS technology. The maximum output current is 100mA and the maximum allowable input voltage is +36V. It has several fixed output voltages, ranging from 2.5V to 5.0V. COMS technology can ensure that it has the characteristics of low voltage drop and low quiescent current.

2 Key Features

- Low power consumption
- Low dropout voltage
- Lower temperature coefficient
- Maximum input voltage: +36V
- Typical static current: 2uA
- Maximum output current: 100mA
- Output voltage accuracy: $\pm 2\%$
- Available Packages:
SOT23-3, SOT89

3 Application Field

- Battery-powered equipment
- Communication equipment
- Audio/video equipment

4 Product Selection

Part No.	Output voltage	Packaging	Official seal
VK7125-1	2.5V	SOT23-3 SOT89	VK71XX-1 (Package as SOT23-3) VK71XX-1 (Package as SOT89)
VK7130-1	3.0V		
VK7133-1	3.3V		
VK7136-1	3.6V		
VK7144-1	4.4V		
VK7150-1	5.0V		


Note: "xx" represents the output voltage.

5 Ordering Information


Part No.	Packaging	Tube Qty	Tray(reel)Qty	Box Qty	Total Qty	Notes
VK7125-1	SOT23-3	—	3000/reel	9000/box	108000 PCS	
	SOT89	—	1000/reel	3000/box	36000 PCS	
VK7130-1	SOT23-3	—	3000/reel	9000/box	108000 PCS	
	SOT89	—	1000/reel	3000/box	36000 PCS	
VK7133-1	SOT23-3	—	3000/reel	9000/box	108000 PCS	
	SOT89	—	1000/reel	3000/box	36000 PCS	
VK7136-1	SOT23-3	—	3000/reel	9000/box	108000 PCS	
	SOT89	—	1000/reel	3000/box	36000 PCS	
VK7144-1	SOT23-3	—	3000/reel	9000/box	108000 PCS	
	SOT89	—	1000/reel	3000/box	36000 PCS	
VK7150-1	SOT23-3	—	3000/reel	9000/box	108000 PCS	
	SOT89	—	1000/reel	3000/box	36000 PCS	

6 Functional Description


6.1 Block Diagram

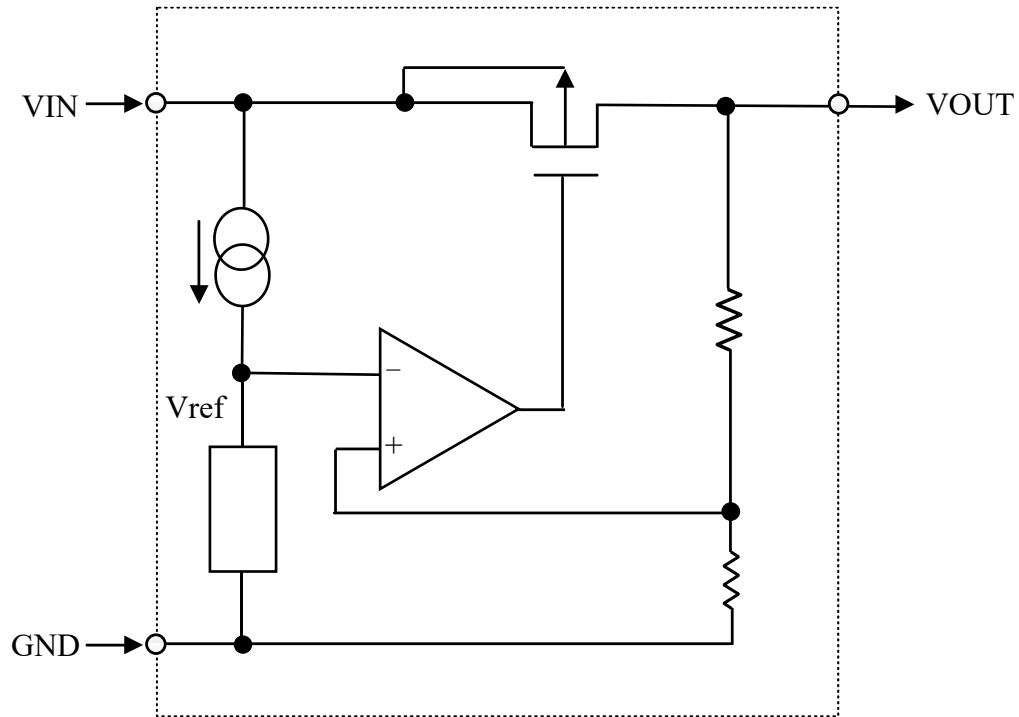

7 Package Pinout Information(SOT-89 / SOT23-3)

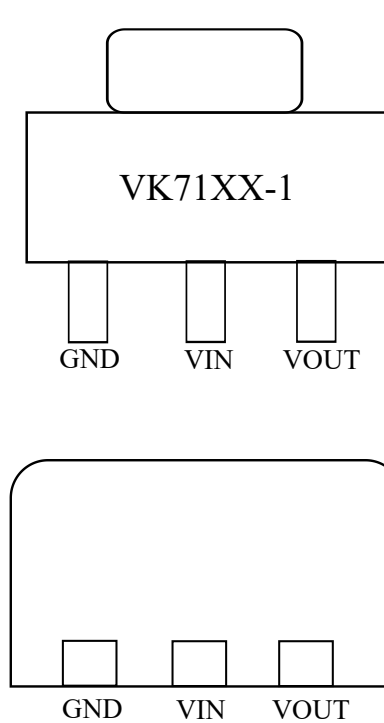

SOT-89

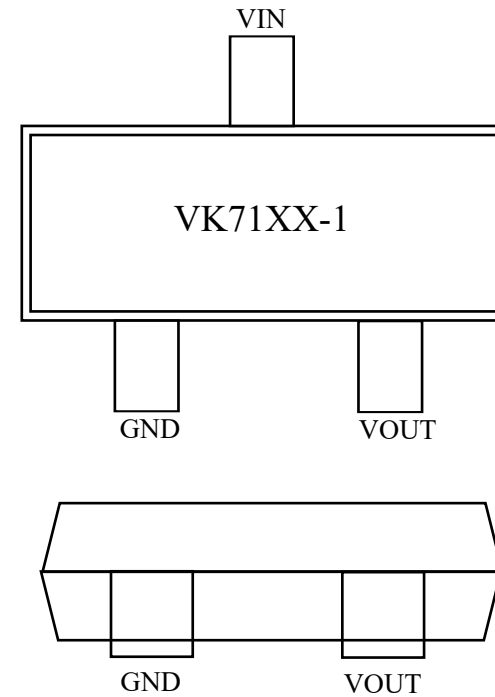

SOT23-3

For more information: 11-12 page

7.1 VK71XX-1/SOT-89/SOT23-3 Pin Description

No.	Name	Function
1	GND	Negative power supply
2	VIN	Input pin
3	VOUT	Output pin

8 Limit Parameters

Power supply voltage ----- -0.3V ~+36V

Storage temperature range ----- -45°C~+140°C

Working environment temperature ----- -40°C~+85°C

Note: Here, only the rated power is emphasized. Exceeding the range specified by the limit parameters will cause damage to the chip. It is impossible to predict the working state of the chip outside the above-mentioned marked range. Moreover, if it operates for a long time under conditions outside the marked range, it may affect the reliability of the chip.

*When choosing the input voltage and output current, be sure that the power consumption does not exceed the PD value.

8.1 Thermal Information

Symbol	Parameter	Packaging	Max.	Unit
θ_{JA}	Thermal resistance (connection with the environment) (assuming no environmental airflow and no heat sink)	SOT23-3	500	°C/W
		SOT89	200	°C/W
PD	Power consumption	SOT23-3	0.2	W
		SOT89	0.5	W

Note: The PD value was measured at Ta=25°C.

8.2 Electrical Characteristics

Note 1: Avoid the internal power consumption (PD) of the IC exceeding the maximum power consumption value allowed by the package.

The calculation method of PD: $PD = (VIN - VOUT) \times I_{OUT}$

For example, in the SOT89 package, when VIN=12V and IOUT=100mA,

$PD = (12 - 5) \times 100mA = 0.7W$. Exceeding the specification of 0.5W May damage the IC.

For PD values of different packages, please refer to the "Thermal Energy Information" column.

VK7125-1,+2.5V Output

Ta=25℃

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	—	—	—	36(Note1)	V
V _{OUT}	Output voltage	V _{IN} =V _{OUT} +2V I _{OUT} =10mA	2.450	2.500	2.550	V
I _{OUT}	Output current	V _{IN} =V _{OUT} +2V	70	100	—	mA
ΔV _{OUT}	Load regulation rate	V _{IN} =V _{OUT} +2V 1mA ≤ I _{OUT} ≤ 50mA	—	25	60	mV
V _{DIF}	Dropout Voltage	I _{OUT} =1mA, ΔV _O =2%	—	2	4	mV
I _{SS}	Static current	No load	—	2	3.0	uA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Input voltage regulation rate	V _O +1V ≤ V _{IN} ≤ 36V I _{OUT} =1mA	—	—	0.2	%/V
$\frac{\Delta V_{OUT}}{\Delta T_a \times V_{OUT}}$	Temperature coefficient	I _{OUT} =10mA -40℃ < T _a < 85℃	—	100	—	ppm/℃

Note: Under the condition of V_{IN}=V_{OUT}+2V and a fixed load, the output voltage drops by 2%. At this time, the input voltage minus the output voltage is the Dropout voltage.

VK7130-1,+3.0V Output

Ta=25℃

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	—	—	—	36(Note1)	V
V _{OUT}	Output voltage	V _{IN} =V _{OUT} +2V I _{OUT} =10mA	2.940	3.000	3.060	V
I _{OUT}	Output current	V _{IN} =V _{OUT} +2V	70	100	—	mA
ΔV _{OUT}	Load regulation rate	V _{IN} =V _{OUT} +2V 1mA ≤ I _{OUT} ≤ 50mA	—	25	60	mV
V _{DIF}	Dropout Voltage	I _{OUT} =1mA, ΔV _O =2%	—	2	4	mV
I _{SS}	Static current	No load	—	2.0	3.0	uA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Input voltage regulation rate	V _O +1V ≤ V _{IN} ≤ 36V I _{OUT} =1mA	—	—	0.2	%/V
$\frac{\Delta V_{OUT}}{\Delta T_a \times V_{OUT}}$	Temperature coefficient	I _{OUT} =10mA -40℃ < T _a < 85℃	—	100	—	ppm/℃

Note: Under the condition of V_{IN}=V_{OUT}+2V and a fixed load, the output voltage drops by 2%. At this time, the input voltage minus the output voltage is the Dropout voltage.

VK7133-1, +3.3V Output

Ta=25℃

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	—	—	—	36(Note1)	V
V _{OUT}	Output voltage	V _{IN} =V _{OUT} +2V I _{OUT} =10mA	3.234	3.300	3.366	V
I _{OUT}	Output current	V _{IN} =V _{OUT} +2V	70	100	—	mA
ΔV _{OUT}	Load regulation rate	V _{IN} =V _{OUT} +2V 1mA ≤ I _{OUT} ≤ 50mA	—	25	60	mV
V _{DIF}	Dropout Voltage	I _{OUT} = 1mA, ΔV _o = 2%	—	2	4	mV
I _{SS}	Static current	No load	—	2.0	3.0	uA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Input voltage regulation rate	V _o +1V ≤ V _{IN} ≤ 36V I _{OUT} = 1mA	—	—	0.2	%/V
$\frac{\Delta V_{OUT}}{\Delta T_a \times V_{OUT}}$	Temperature coefficient	I _{OUT} = 10mA -40℃ < T _a < 85℃	—	100	—	ppm/℃

Note: Under the condition of V_{IN}=V_{OUT}+2V and a fixed load, the output voltage drops by 2%. At this time, the input voltage minus the output voltage is the Dropout voltage.

VK7136-1, +3.6V Output

Ta=25℃

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	—	—	—	36(Note1)	V
V _{OUT}	Output voltage	V _{IN} =V _{OUT} +2V I _{OUT} =10mA	3.528	3.600	3.672	V
I _{OUT}	Output current	V _{IN} =V _{OUT} +2V	70	100	—	mA
ΔV _{OUT}	Load regulation rate	V _{IN} =V _{OUT} +2V 1mA ≤ I _{OUT} ≤ 50mA	—	25	60	mV
V _{DIF}	Dropout Voltage	I _{OUT} = 1mA, ΔV _o = 2%	—	2	4	mV
I _{SS}	Static current	No load	—	2.0	3.0	uA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Input voltage regulation rate	V _o +1V ≤ V _{IN} ≤ 36V I _{OUT} = 1mA	—	—	0.2	%/V
$\frac{\Delta V_{OUT}}{\Delta T_a \times V_{OUT}}$	Temperature coefficient	I _{OUT} = 10mA -40℃ < T _a < 85℃	—	100	—	ppm/℃

Note: Under the condition of V_{IN}=V_{OUT}+2V and a fixed load, the output voltage drops by 2%. At this time, the input voltage minus the output voltage is the Dropout voltage.

VK7144-1, +4.4V Output

Ta=25°C

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	—	—	—	36(Note1)	V
V _{OUT}	Output voltage	V _{IN} =V _{OUT} +2V I _{OUT} =10mA	4.312	4.400	4.488	V
I _{OUT}	Output current	V _{IN} =V _{OUT} +2V	70	100	—	mA
ΔV _{OUT}	Load regulation rate	V _{IN} =V _{OUT} +2V 1mA ≤ I _{OUT} ≤ 50mA	—	25	60	mV
V _{DIF}	Dropout Voltage	I _{OUT} = 1mA, ΔV _O = 2%	—	2	4	mV
I _{SS}	Static current	No load	—	2.0	3.0	uA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Input voltage regulation rate	V _O +1V ≤ V _{IN} ≤ 36V I _{OUT} = 1mA	—	—	0.2	%/V
$\frac{\Delta V_{OUT}}{\Delta T_a \times V_{OUT}}$	Temperature coefficient	I _{OUT} = 10mA -40°C < T _a < 85°C	—	100	—	ppm/°C

Note: Under the condition of V_{IN}=V_{OUT}+2V and a fixed load, the output voltage drops by 2%. At this time, the input voltage minus the output voltage is the Dropout voltage.

VK7150-1, +5.0V Output


Ta=25°C

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	—	—	—	36(Note1)	V
V _{OUT}	Output voltage	V _{IN} =V _{OUT} +2V I _{OUT} =10mA	4.900	5.000	5.100	V
I _{OUT}	Output current	V _{IN} =V _{OUT} +2V	100	100	—	mA
ΔV _{OUT}	Load regulation rate	V _{IN} =V _{OUT} +2V 1mA ≤ I _{OUT} ≤ 50mA	—	25	60	mV
V _{DIF}	Dropout Voltage	I _{OUT} = 1mA, ΔV _O = 2%	—	2	4	mV
I _{SS}	Static current	No load	—	2.0	3.0	uA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Input voltage regulation rate	V _O +1V ≤ V _{IN} ≤ 36V I _{OUT} = 1mA	—	—	0.2	%/V
$\frac{\Delta V_{OUT}}{\Delta T_a \times V_{OUT}}$	Temperature coefficient	I _{OUT} = 10mA -40°C < T _a < 85°C	—	100	—	ppm/°C

Note: Under the condition of V_{IN}=V_{OUT}+2V and a fixed load, the output voltage drops by 2%. At this time, the input voltage minus the output voltage is the Dropout voltage.

9 Function Description


The error amplifier compares the input voltage V_{fb} of the voltage divider resistor composed of the feedback resistors R_s and R_f with the reference voltage V_{ref} . The necessary gate voltage is provided to the output transistor through this error amplifier, so that the output voltage remains constant without being affected by the input voltage or temperature changes.

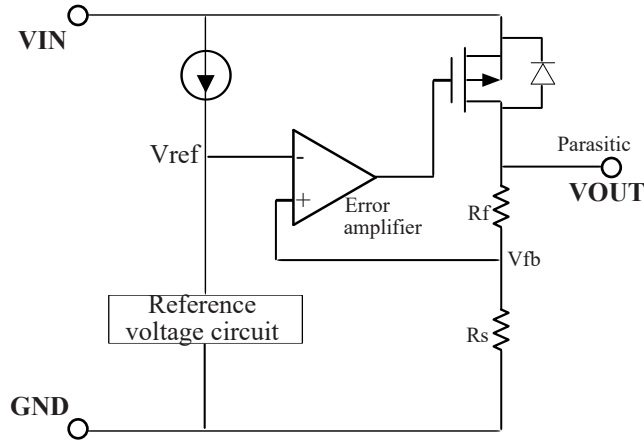

Usage Precautions:


1. The circuit internally employs a phase compensation circuit and uses the ESR of the output capacitor for compensation. Therefore, the output to ground must be connected to a capacitor larger than 2.2 μ F.
2. It is recommended that 10 μ F polarized capacitors be used for input and output during application, and the capacitors be placed as close as possible to the V_{IN} and V_{OUT} pins of the LDO.
3. Pay attention to the usage conditions of input and output voltages and load currents to avoid the internal power consumption PD of the IC exceeding the maximum power consumption value allowed by the package.

10 Application Circuits

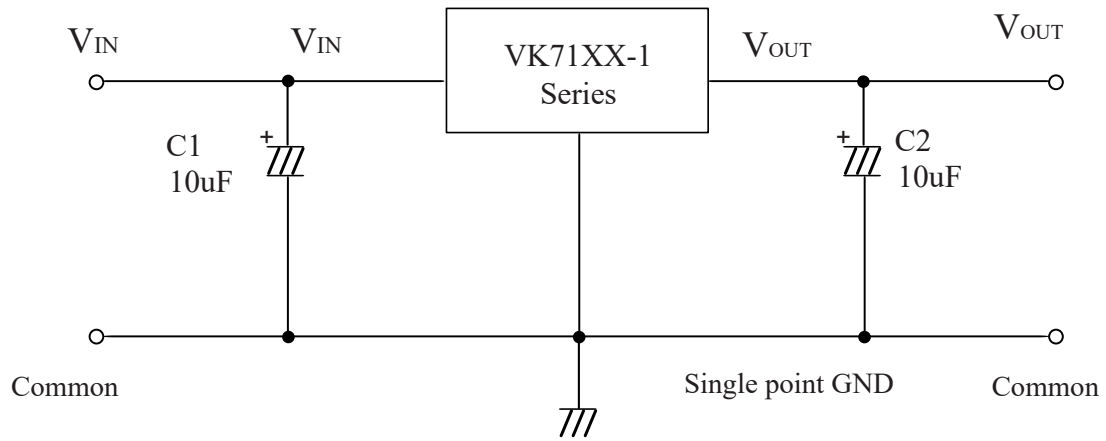



11 Package Information

11.1 SOT23-3 Package size

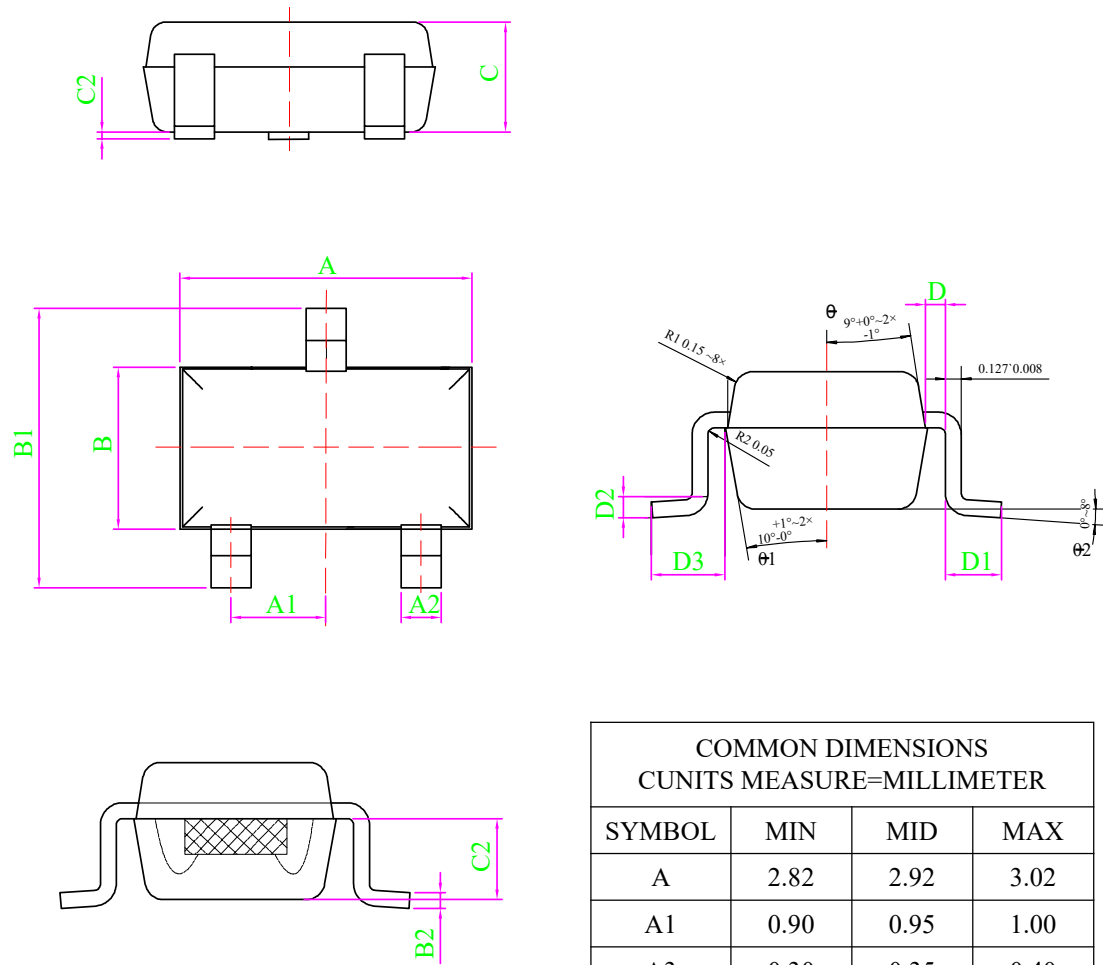

COMMON DIMENSIONS CUNITS MEASURE=MILLIMETER			
SYMBOL	MIN	MID	MAX
A	2.82	2.92	3.02
A1	0.90	0.95	1.00
A3	0.30	0.35	0.40
B	1.52	1.62	1.72
B1	2.80	2.90	3.00
B2	0.12	0.128	0.135
C	1.05	1.10	1.15
C1	0.03	0.08	0.13
C2	0.60	0.65	0.70
D	0.03	0.08	0.13
D1	0.40	0.45	0.50
D2	0.25TYP		
D3	0.60	0.65	0.70

11.2 SOT-89 Package size

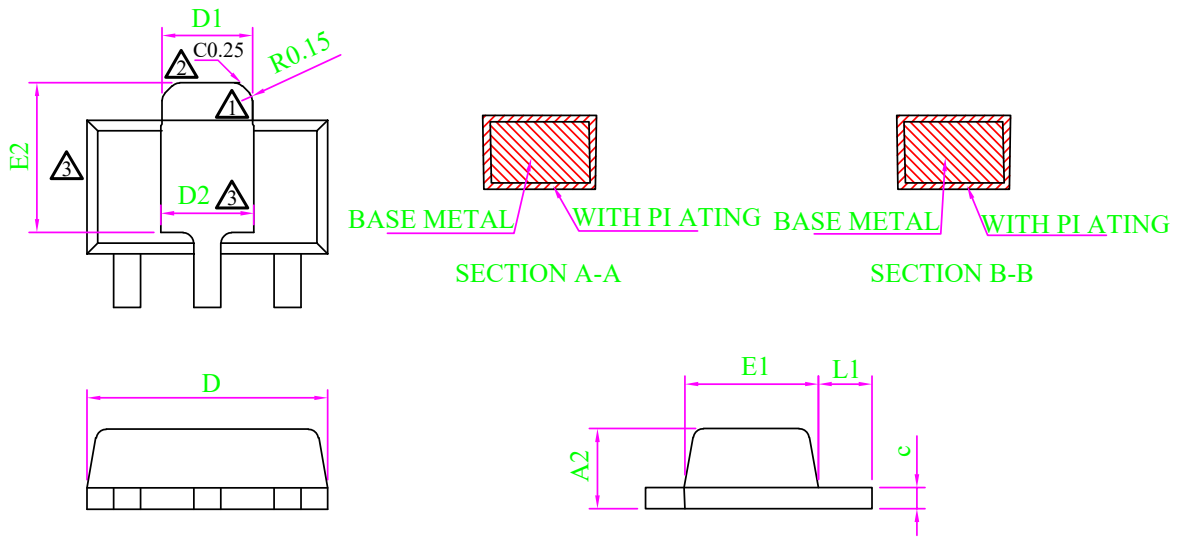

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A2	1.40	1.50	1.60
$\triangle$ b	0.38	-	0.46
b1	0.37	0.40	0.43
$\triangle$ c	0.38	-	0.42
$\triangle$ c1	0.37	0.38	0.39
a	0.46	-	0.56
a1	0.45	0.48	0.51
$\triangle$ D	4.40	4.50	4.60
$\triangle$ D1	1.62	-	1.83
$\triangle$ E	3.95	-	4.25
$\triangle$ E1	2.40	2.50	2.60
e	1.50BSC		
$\triangle$ L1	0.89	-	1.20

L/F Size (mil)	Size(mm)	$\triangle$ D2	$\triangle$ E2
66.9*63		1.75REF	2.84REF

12 Disclaimer

Warranty and liability — The information provided in this document is believed to be accurate and reliable. However, Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter “the Company”) makes no warranties, express or implied, as to the completeness or suitability of this information for any specific purpose.

In no event shall the Company be liable for any indirect, incidental, or consequential damages, including but not limited to loss of profits, equipment damage, or system failure, arising out of the use of this product or documentation, regardless of the legal theory under which such liability is asserted.

Right to change — The Company reserves the right to modify any information contained herein without prior notice. The latest version of this document is available at:

<https://www.szvinka.com/>

Applicability — This product is not designed or intended for use in life-critical, medical, or safety systems where failure could result in injury or death. The customer shall assume full responsibility for any such use.

Application — All product application descriptions provided herein are intended for illustrative purposes only. The Company makes no representations or warranties, express or implied, regarding the suitability of any specific application without further testing or modification.

The customer is solely responsible for determining whether the Company’s products are appropriate for their intended applications or end customers.

The customer shall ensure proper design practices, implementation safeguards, and operational validation to minimize risks associated with product use.

The Company shall not be held liable for any defects, losses, costs, or damages arising from weaknesses or failures in the customer’s own products or applications, or from the integration or use of third-party products.

Furthermore, the customer shall conduct all necessary testing and validation for any third-party deployment of the Company’s products to avoid potential misuse or associated damages. The Company assumes no liability in this regard.

Commercial terms of sale — Unless otherwise agreed in writing, sales of this product are subject to the Company’s standard terms and conditions of sale. The Company expressly rejects the applicability of the customer’s general terms and conditions.

Export control — This product may be subject to applicable export control regulations. The customer is solely responsible for compliance with such regulations, including obtaining any necessary export licenses.

13 Revision History

No.	Version	Date	Modify the content	Check
1	1.0	2020-08-10	initial release	YES
2	1.1	2025-11-07	Change Description	YES

[1] Please refer to the latest version of this document before starting or finalizing any design.

[2] Since the release of this document, the status or availability of this product may have changed. For the most up-to-date information, please visit:

<https://www.szvinka.com/>