



VK16K33B Datasheet

12×8 LED Driver Display Chip

Rev.1.3

Intellectual Property Statement:

Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter referred to as “the Company”) owns legally registered intellectual property rights in both domestic and international jurisdictions. Any unauthorized use of the Company’s products or patented technologies by individuals or organizations is strictly prohibited.

The Company reserves the right to take legal action against any infringement, and to seek full compensation for damages or unlawful gains.

The Company’s name and trademarks are legally protected and may not be used or imitated without explicit written permission. No implied or express license shall be granted under any circumstances.

1 General Description

The VK16K33B is a dedicated chip for digital tube or dot matrix LED driver control with a key scanning interface. It integrates circuits such as a data latch, keyboard scanning, and LED driver module internally. The data communicates with the MCU through the I2C communication interface. The SEG pin is connected to the anode of the LED, and the GRID pin is connected to the cathode of the LED, which can support a dot matrix LED display panel of 12SEG×8GRID. Supports a maximum of 10×3 keys. It is equipped with an internal power-on reset circuit, and the overall flashing frequency can be set. It can enter standby mode through commands and adopts the SOP24 package form.

2 Key Features

- Operating voltage:3.0-5.5V
- Integrated RC oscillator
- Up to 12 SEG pins and 8 GRID pins
- The SEG pin can only be connected to the anode of the LED, and the GRID pin can only be connected to the cathode of the LED
- I2C communication interface allows the I2C slave address to be selected through the IO pin
- The overall brightness is adjustable at 16 levels
- Maximum 10×3 key scanning
 - Key display multiplexing (requires hardware circuit coordination)
 - Support combination keys (requires circuit coordination)
- Read/write display/key data addresses are automatically incremented by 1
- The built-in display RAM is 16×8 bits
- Built-in power-on reset circuit
- The overall flashing frequency can be set
- Enter standby mode through a command
- It has a large driving current and is suitable for high-brightness display scenarios
- Available Packages:
 - SOP24(300mil)(15.40mm×7.50mm PP=1.27mm).

3 Product Selection


Part No.	Common Cathode Drive	Common Anode Drive	Key press	Packaging
VK16K33A	16 / 8	8 / 16	13×3	SOP28
VK16K33AA	16 / 8	8 / 16	13×3	SSOP28
VK16K33AQ	16 / 8	8 / 16	13×3	QFN28L(4mm×4mm)
VK16K33B	12 / 8	8 / 12	10×3	SOP24
VK16K33BA	12 / 8	8 / 12	10×3	SSOP24
VK16K33BQ	12 / 8	8 / 12	10×3	QFN24L(4mm×4mm)
VK16K33C	8 / 8	8 / 8	8×3	SOP20
VK16K33CQ	8 / 8	8 / 8	8×3	QFN20L(3mm×3mm)

Note: For both common cathode and common anode digital tubes, SEG is connected to the anode and GRID to the cathode.

4 Ordering Information

Part No.	Packaging	Tube Qty	Tray(reel)Qty	Box Qty	Total Qty	Notes
VK16K33A	SOP28	26/tube		2080/box	20800 PCS	
VK16K33AA	SSOP28	50/tube		10000/box	100000 PCS	
VK16K33AQ	QFN28L		490/reel	4900/box	29400 PCS	
VK16K33B	SOP24	30/tube		2400/box	24000 PCS	
VK16K33BA	SSOP24	50/tube		10000/box	100000 PCS	
	SSOP24		4000/reel	8000/box	64000 PCS	
VK16K33BQ	QFN24L		490/reel	4900/box	29400 PCS	
VK16K33C	SOP20	36/tube		2880/box	28800 PCS	
VK16K33CQ	QFN20L		490/reel	4900/box	29400 PCS	

5 Package Pinout Information(SOP24)

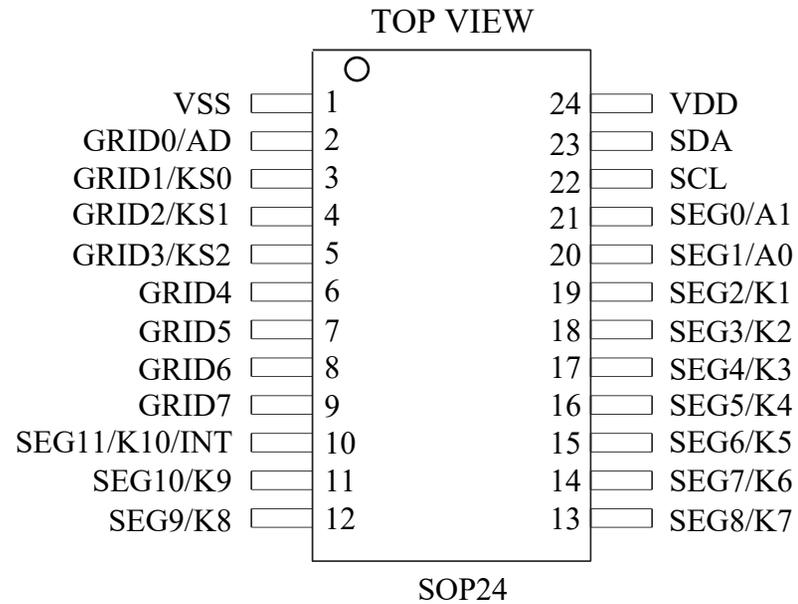

For more information: [Page 23](#)


5.1 VK16K33B/SOP24 Pin Description

No.	Name	I/O	Function
1	VSS	VSS	Negative power supply
2	GRID0/AD	O	LED GRID output (N-channel open-drain output). The I2C slave address setting output pin is connected to the common pin of a resistor connected in series with three address input pins through a diode.
3-5	GRID1/KS0- GRID3/KS2	O	LED GRID output (N-channel open-drain output); Key scan output.
6-9	GRID4 ~GRID7	O	LED GRID output (N-channel open-drain output)
11-19	SEG10/K9- SEG2/K1	I/O	LED SEG output (P-channel); Key scanning input, the key signal is latched after the display cycle ends.
20-21	SEG2/A0- SEG0/A1	I/O	LED SEG output (P-channel). The I2C slave address setting input pin is connected to the diode connected in series with the address output pin after a resistor is connected in series, and it is 0 when left unconnected. Eight addresses can be set: 0xE0-0xEE, with Bit0 being the read/write bit. * 1
22	SCL	I	The I2C serial clock pin requires an external pull-up resistor
23	SDA	I/O	The I2C serial data input/output pins need to be connected to an external pull-up resistor
24	VDD	VDD	Positive power supply
10	SEG11/K10/INT	I/O	<p>I. When the Bit0 of the SEG/INT register is set to "0", this pin serves as the LED SEG output (P-channel driver) and the input for key scanning. The key signal is latched after the display cycle ends.</p> <p>II. When the Bit0 of the SEG/INT register is set to "1", this pin is an interrupt (INT) output. When the Bit1 of the SEG/INT register is set to "0", the INT output is valid at a low level. When the Bit1 of the SEG/INT register is set to "1", the INT output is valid at a high level</p> <p>III. The button function and the INT function for this pin are mutually exclusive and only one can be selected at a time.</p>

*1 Update the I2C slave address during power-on reset or key scan cycles

6 Functional Description

6.1 Block Diagram

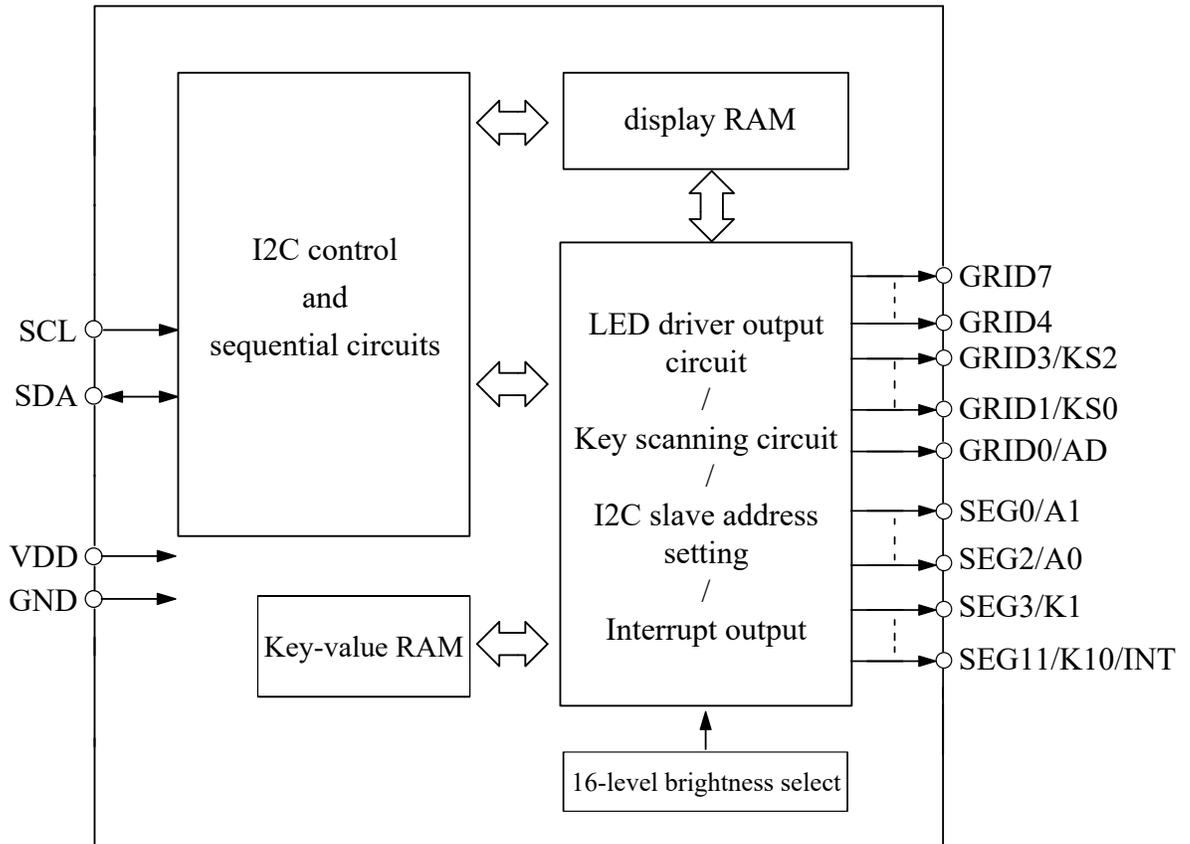


6.2 Power-On Reset

After power-on, the chip is initialized through the internal power-on reset circuit. Within 1ms after power-on reset, I2C data transmission is avoided. The state after initialization is as follows:

- The system oscillator is turned off
- GRID0 to GRID3 output VDD
- GRID4 to GRID7 output high impedance
- All SEG pins are input pins
- The LED display is turned off
- Button scanning stops
- Set the SEG/INT pin to SEG output
- The display brightness is 16/16 Duty.

For a power-on reset to be triggered during operation (e.g., if VDD drops below the specified minimum operating voltage), the following condition must be met: VDD must fall to 0V and remain there for at least 20ms before rising to the normal operating voltage.

Power-on reset sequence

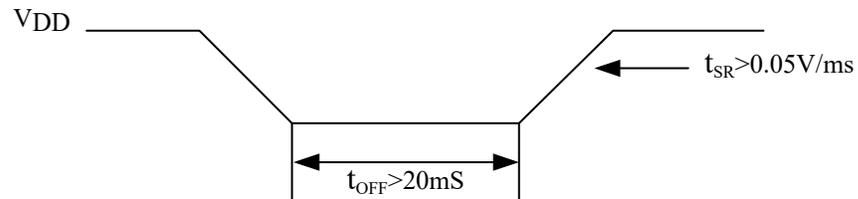

6.3 Standby Mode And Wake-up

Standby mode


In standby mode, apart from system setting commands, the VK16K33B does not accept any input commands and cannot write data to the display RAM. If the system sets the Bit0 of the register to "0", it enters the standby mode.

The status in standby mode is as follows:

- The system oscillator is turned off.
- GRID0 to GRID3 output VDD.
- GRID4 to GRID7 output high impedance.
- The LED display is off.
- Button scanning stops.
- All key data and the INT flag bit are reset to zero until the standby mode is lifted.
- If any key is pressed or the system setting register Bit0 is set to 1, the standby mode is lifted and the chip is awakened.
- In standby mode, all SEG pins are set to input state, unless the SEG/INT pin is configured as an INT output.
- If the Bit0 in the SEG/INT register is set to 1, all SEG pins are set as inputs except for the SEG/INT pin which is set as an INT output.
- If the Bit1 in the SEG/INT setting register is set to 0, the INT pin maintains a high-level output.
- If the Bit1 bit in the SEG/INT setting register is set to 1, the INT pin maintains a low-level output.

Wake up

- The chip can be awakened by pressing a valid key or setting the system setting register Bit0 to 1, and then the key scan can be performed.
- The system oscillator has started to work normally.
- In standby mode, the VK16K33A can still be written with any command, and the last command will be executed after it is awakened. The relationship between pressing a key and the wake-up action is shown in the following figure.

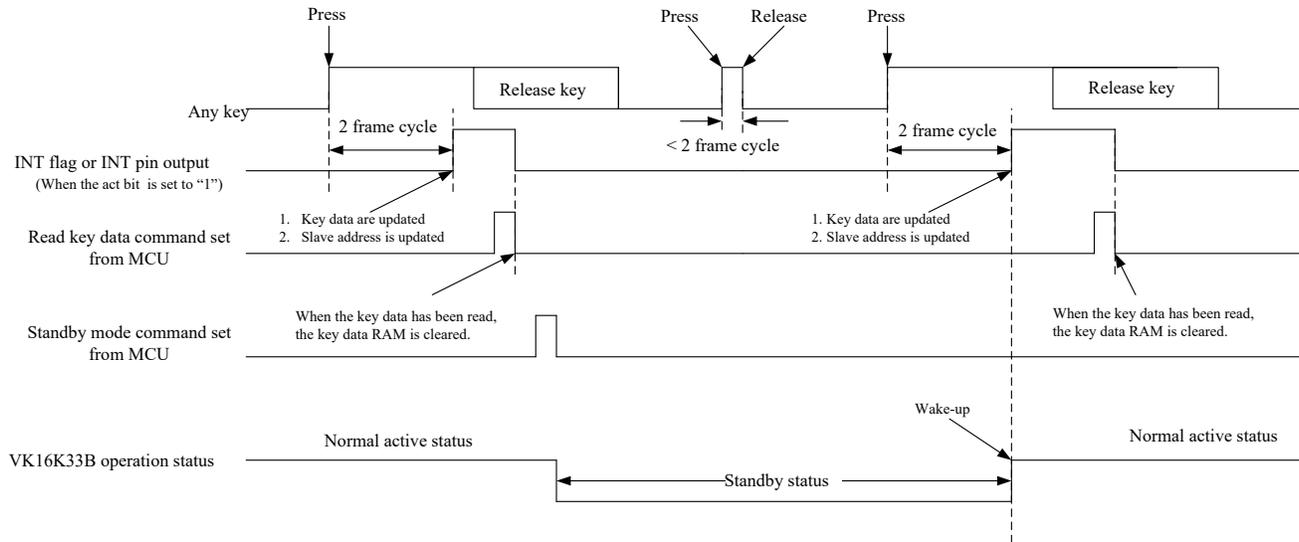

6.4 Display RAM- Storage Structure

The static display memory (RAM) has a structure of 16×8 bits and stores the displayed data. The content of RAM is directly mapped to the display content of the LED driver, with the display address ranging from 0x00 to 0x0F, and there are a total of 16 display units.

If you want to turn on or off a certain LED, simply set the corresponding display RAM position to 1 or clear it to 0:

For instance, to control the on/off of LED1 driven by pin SEG0 and pin GRID0, simply set the Bit0 position of the corresponding display RAM (address 0x00) to 1 or clear to 0.

The process of mapping the contents in RAM to leds is shown in the following table:

SEG GRID					SEG11	SEG10	SEG9	SEG8	Addr	SEG7	SEG6	SEG5	SEG4	SEG3	SEG2	SEG1	SEG0	Addr	SEG GRID
GRID0									0x01								LED1	0x00	GRID0
GRID1									0x03									0x02	GRID1
GRID2									0x05									0x04	GRID2
GRID3									0x07									0x06	GRID3
⋮									⋮									⋮	⋮
GRID7									0x0F									0x0E	GRID7
	D7	D6	D5	D4	D3	D2	D1	D0		D7	D6	D5	D4	D3	D2	D1	D0		


Note:

The content of the display RAM at power-on is undefined. It is recommended to initialize the display RAM by writing 0x00 to all 16 addresses (0x00-0x0F) after power-up.

The SEG pin can only be connected to the anode of the LED, and the GRID pin can only be connected to the cathode of the LED. They must not be reversed.

7 Key Scanning

7.1 Key Data Reading

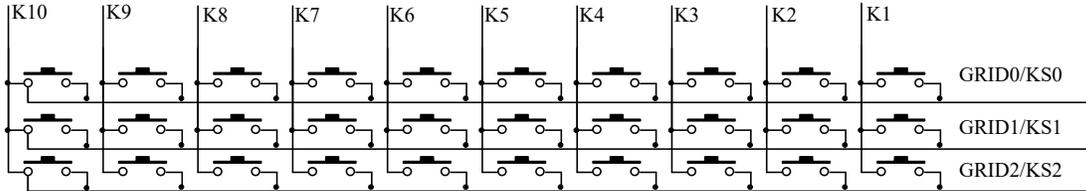

Key scanning is automatically completed by the hardware, and users only need to read the key values through I2C. When a key is pressed, an INT interrupt is generated. This interrupt flag can be read via I2C or output through the INT pin (open-leak output). Within one key scanning cycle, the total debouncing time for 30 (10x3) key scans is at least 20ms. An INT interrupt will be generated when one or more keys that were not pressed in the previous scanning period are scanned within the sampling period. During each debouncing cycle, the key scanning circuit will detect the number of keys pressed simultaneously (supporting multiple keys pressed at the same time).

When all key data has been read, the key data RAM is cleared and the INT flag bit is reset to "0". If the SEG/INT pin is set to INT output, the INT pin returns to the level when no key was pressed.

INT flag bit register:

INT register address	INT								Function Description
	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	
0x60	INT flag bit	The INT flag is set to '1' upon any key press. It is cleared to '0' after all key data is read.							

Key value RAM address and corresponding key:


Key value RAM address							
	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x40	KS0/K8	KS0/K7	KS0/K6	KS0/K5	KS0/K4	KS0/K3	KS0/K2	KS0/K1
0x41	0	0	0	0	0	0	KS0/K10	KS0/K9
0x42	KS1/K8	KS1/K7	KS1/K6	KS1/K5	KS1/K4	KS1/K3	KS1/K2	KS1/K1
0x43	0	0	0	0	0	0	KS1/K10	KS1/K9
0x44	KS2/K8	KS2/K7	KS2/K6	KS2/K5	KS2/K4	KS2/K3	KS2/K2	KS2/K1
0x45	0	0	0	0	0	0	KS2/K10	KS2/K9

Note:

It is recommended to only perform read operations on the key-value RAM and read the data from address 0x40 to 0x45 in sequence starting from address 0x40

7.2 Key Scan Timing


The key scanning sequence is shown in the figure:

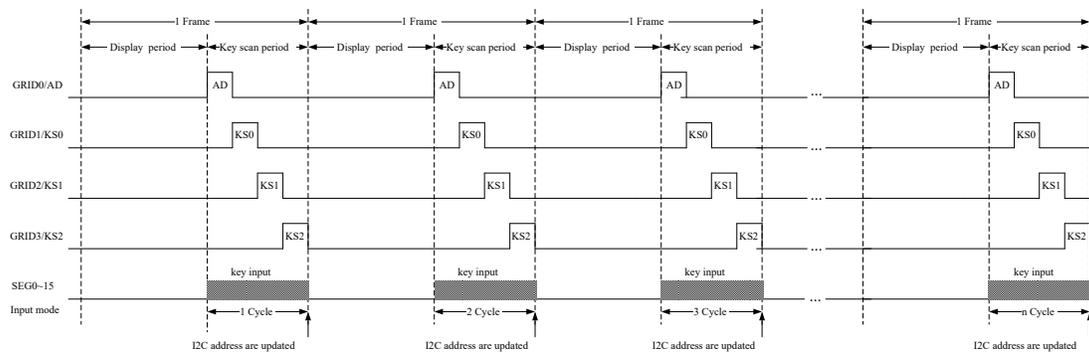


Note: The I2C slave address is updated during the key scan cycle.

7.3 Combined Key Circuit

When the number of keys pressed simultaneously is ≥ 3 , a diode needs to be connected in series with each combination key, as shown in the following figure:

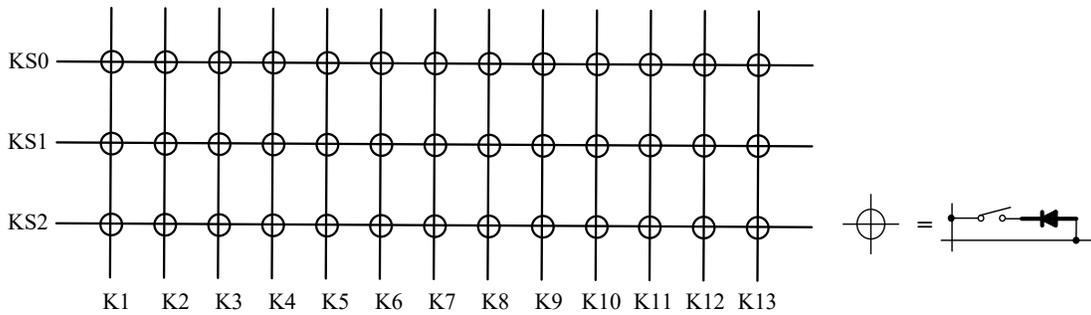

When the number of keys pressed simultaneously is ≤ 2 , a diode needs to be connected in series with the KS0-KS2 keys, as shown in the following figure:

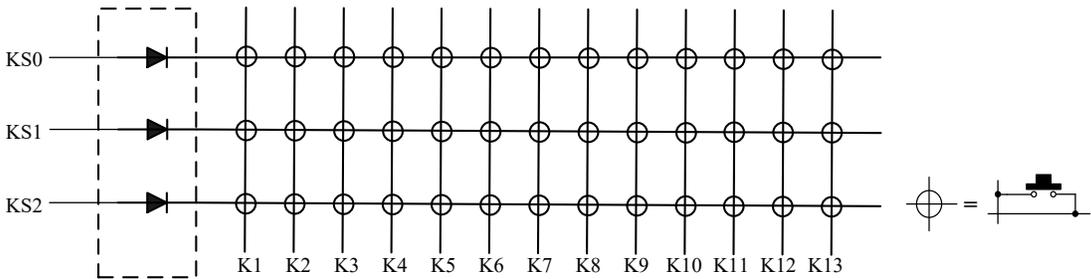

Note:




This circuit does not allow three or more keys to be pressed simultaneously; otherwise, the keys may not be correctly recognized.

8 Communication Commands


8.1 I2C Communication Interface

The VK16K33B has two communication pins and follows the I2C protocol.

The SCL pin is the clock input pin, and the SDA pin is the serial data input/output pin. When the I2C bus is idle, both of these pins are at a high level. The data on the SDA line must remain stable at high levels of the clock. The clock signal on the SCL line can only be changed when it is at a low level. When the SCL signal is at a high level and the SDA signal changes from a high level to a low level, the data cable starts to work or resumes work. When the SCL signal is at a high level and the SDA signal changes from a low level to a high level, it stops working.

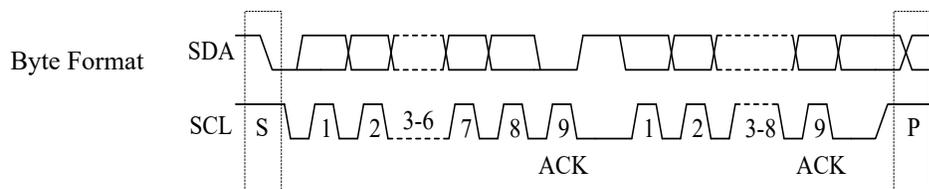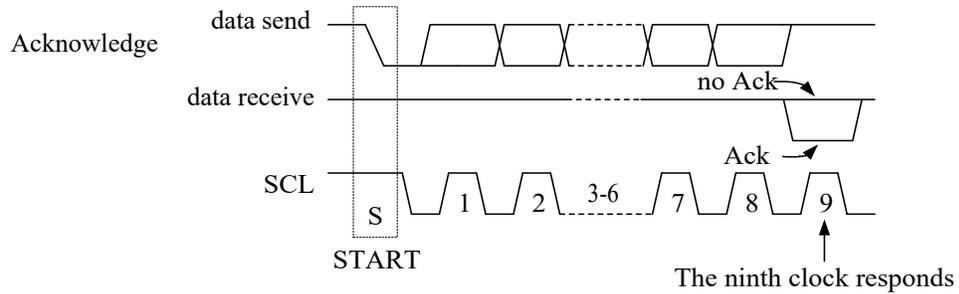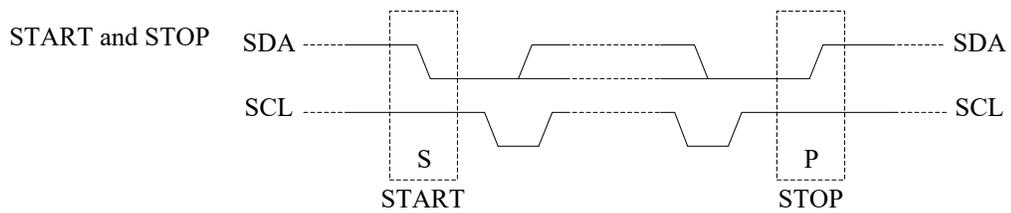


8.2 I2C Address Settings

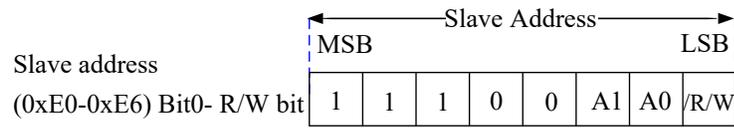

The I2C slave address is selected through the IO pin and updated during power-on reset or key scan cycles

As shown in the following figure:

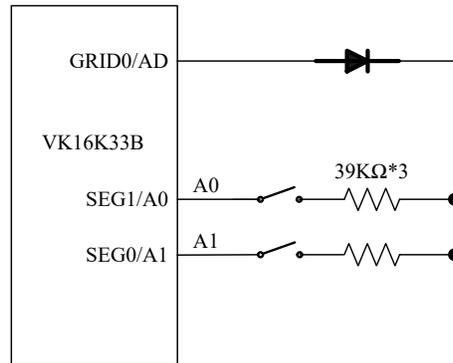


Note:

A1-A0 are read as '0' if left floating (unconnected), and as '1' if connected to VDD. If all are left floating, the address is 0xE0.


9 I2C Command Format

Write operation


Write commands

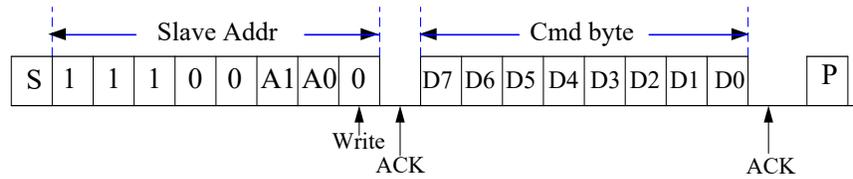

Write a single byte of data to display RAM

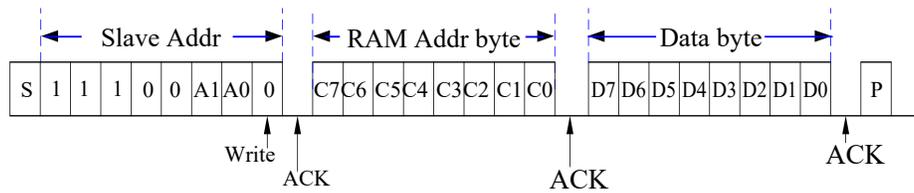


Write multiple bytes of data to the display RAM

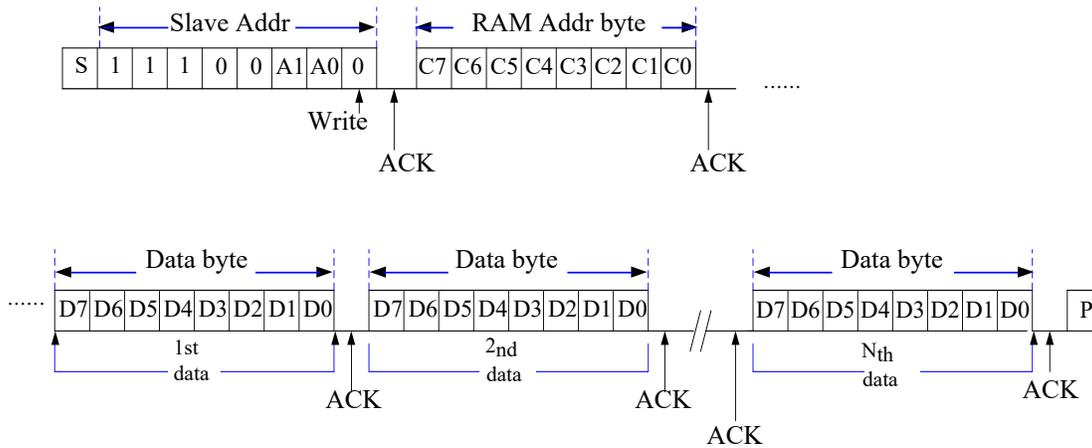


9.1 Read Operation

Reading a data byte does not apply to reading key values.

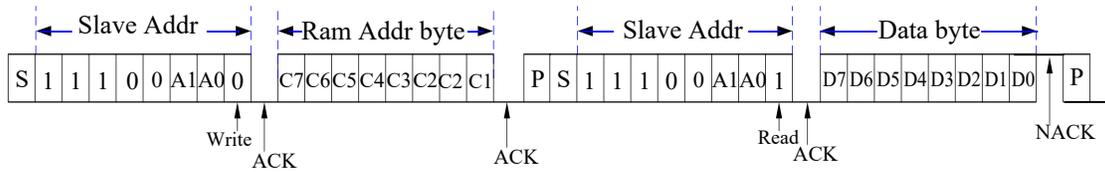

When reading N bytes, the address pointer automatically increments by 1 upon receiving the ACK from the host. When reading the key, the address starts from 0x40 and continuously reads 6 pieces of data.

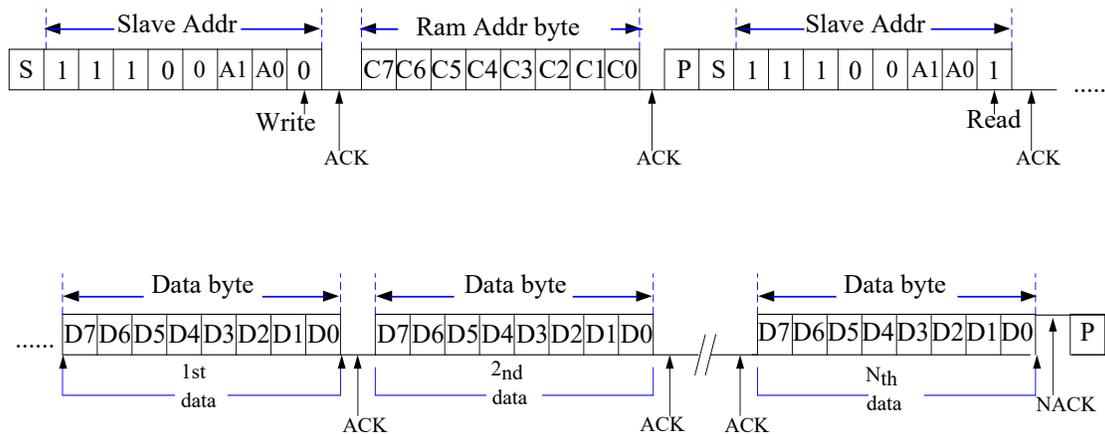

10 Command Description

10.1 System Settings Commands

This command is used to set the working mode of the chip: normal mode or standby mode.

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Function	Note	Default
0	0	1	0	X	X	X	0	System oscillator	Standby mode(oscillator off)	0x20
0	0	1	0				1	On/Off	Normal mode(with the oscillator on)	

10.2 Display Setting Commands

This command is used to set the on/off of the LED display and the overall flashing frequency of the LED.

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Function	Note	Default
1	0	0	0	X			0	Show on/off	Show off	0x80
1	0	0	0				1		Display on	
1	0	0	0	X		0		Flickering frequency	Flashing off	0x80
1	0	0	0			0	1		2Hz	
1	0	0	0			1	0		1Hz	
1	0	0	0			1	1		0.5Hz	

10.3 SEG/INT Pin Function Setting Command

This command is used to set the output function of the INT/SEG pin.

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Function	Note	Default
1	0	1	0	X	X	0	0	INT/SEG pin function selection and INT pin output level setting	Set to SEG output	0xA0
1	0	1	0			0	1	Set to INT output, active low		
1	0	1	0			1	1	Set to INT output, active high		

10.4 Display Address Setting Command

This command is used to set the address of the display RAM (0x00-0x0F). When powered on, the address is set to 0x00 by default.

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Display RAM address
0	0	0	0	0	0	0	0	0x00
0	0	0	0	0	0	0	1	0x01
0	0	0	0	0	0	1	0	0x02
0	0	0	0	0	0	1	1	0x03
0	0	0	0	0	1	0	0	0x04
0	0	0	0	0	1	0	1	0x05
0	0	0	0	0	1	1	0	0x06
0	0	0	0	0	1	1	1	0x07
0	0	0	0	1	0	0	0	0x08
0	0	0	0	1	0	0	1	0x09
0	0	0	0	1	0	1	0	0x0A
0	0	0	0	1	0	1	1	0x0B
0	0	0	0	1	1	0	0	0x0C
0	0	0	0	1	1	0	1	0x0D
0	0	0	0	1	1	0	1	0x0E
0	0	0	0	1	1	1	1	0x0F

10.5 Display Brightness Setting Command

This command is used to set the display brightness (level 16).


Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Function	Note
1	1	1	0	0	0	0	0	Set the GRID pulse width	Set the pulse width to 1/16
1	1	1	0	0	0	0	1		Set the pulse width to 2/16
1	1	1	0	0	0	1	0		Set the pulse width to 3/16
1	1	1	0	0	0	1	1		Set the pulse width to 4/16
1	1	1	0	0	1	0	0		Set the pulse width to 5/16
1	1	1	0	0	1	0	1		Set the pulse width to 6/16
1	1	1	0	0	1	1	0		Set the pulse width to 7/16
1	1	1	0	0	1	1	1		Set the pulse width to 8/16
1	1	1	0	1	0	0	0		Set the pulse width to 9/16
1	1	1	0	1	0	0	1		Set the pulse width to 10/16
1	1	1	0	1	0	1	0		Set the pulse width to 11/16
1	1	1	0	1	0	1	1		Set the pulse width to 12/16
1	1	1	0	1	1	0	0		Set the pulse width to 13/16
1	1	1	0	1	1	0	1		Set the pulse width to 14/16
1	1	1	0	1	1	1	0		Set the pulse width to 15/16
1	1	1	0	1	1	1	1		Set the pulse width to 16/16

11 Command Application


11.1 Initialize Configuration

When powering on, the power-on reset sequence must be met. After power-on, parameters need to be configured first.

The initial parameters are configured through a series of commands, and the command sequence is as shown in the following figure:

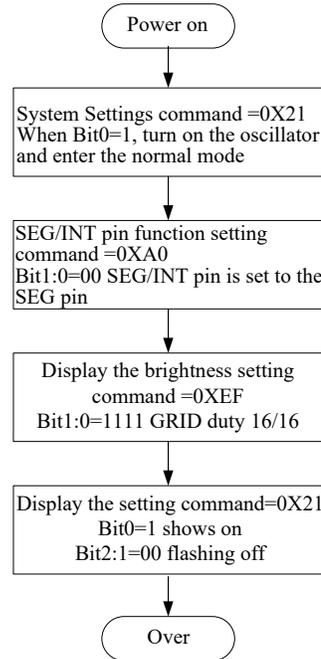


11.2 Display Data Write Command Sequence

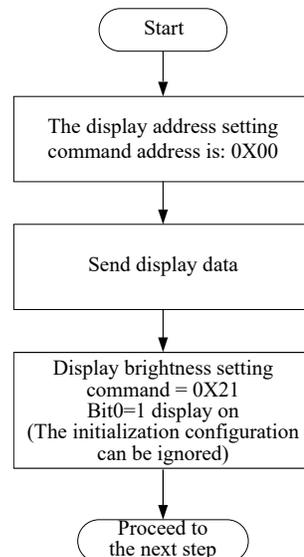


11.3 Key-value read Command sequence

It is recommended to only perform read operations on the key data RAM and start from address 0x40. Each read operation should sequentially read the data from address 0x40 to 0x45.

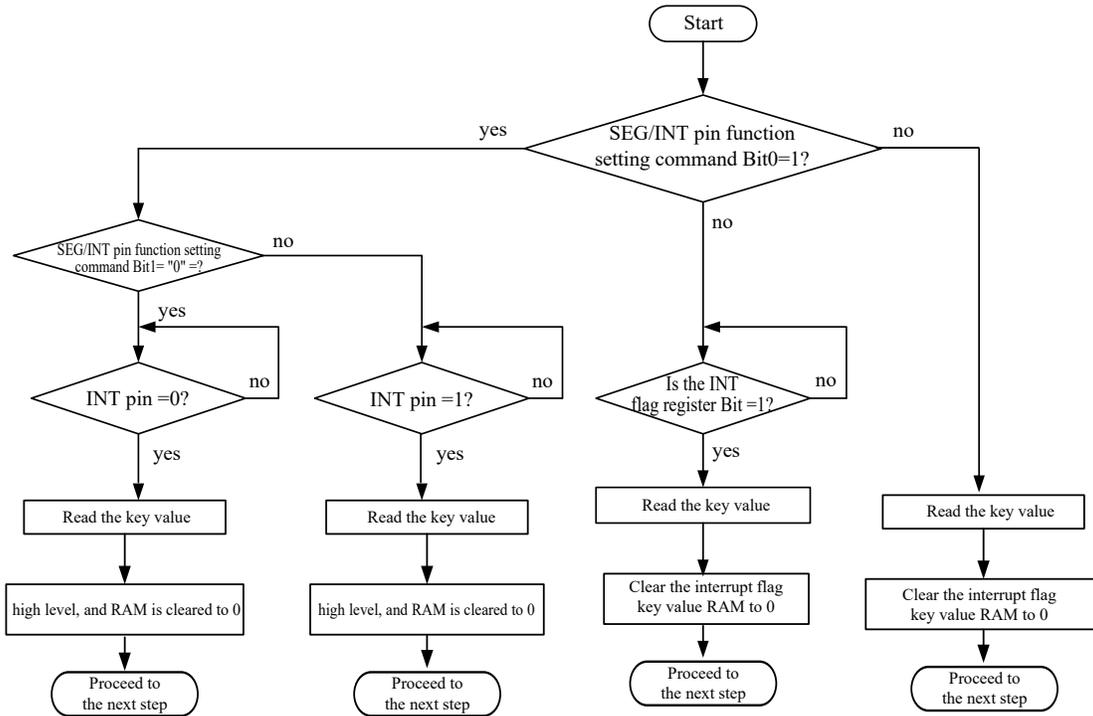

12 Application Circuits



When the surrounding interference is relatively large, a 10R to 10k resistor and a PF-level small capacitor to ground can be connected in series on the communication pin. When the power supply of the single-chip microcomputer (3.3V) and the driver chip (5V) is inconsistent, it is recommended to add a level conversion circuit on the communication pin

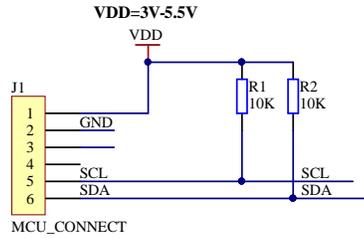



U1			
GRID0	2	VSS	VDD
GRID1	3	GRID0/AD	SDA
GRID2	4	GRID1/KS0	SCL
GRID3	5	GRID2/KS1	SEG0/A1
GRID4	6	GRID3/KS2	SEG1/A0
GRID5	7	GRID4	SEG2/K1
GRID6	8	GRID5	SEG3/K2
GRID7	9	GRID6	SEG4/K3
SEG11	10	GRID7	SEG5/K4
SEG10	11	SEG11/K10/INT	SEG6/K5
SEG9	12	SEG10/K9	SEG7/K6
		SEG9/K8	SEG8/K7

VK16K33B_SOP24

The filter capacitor between VDD and GND should be placed as close to the chip as possible on the PCB board to enhance the filtering effect.



A1-A0 is 0 for dangling and 1 for connecting. All dangling addresses are 0xE0

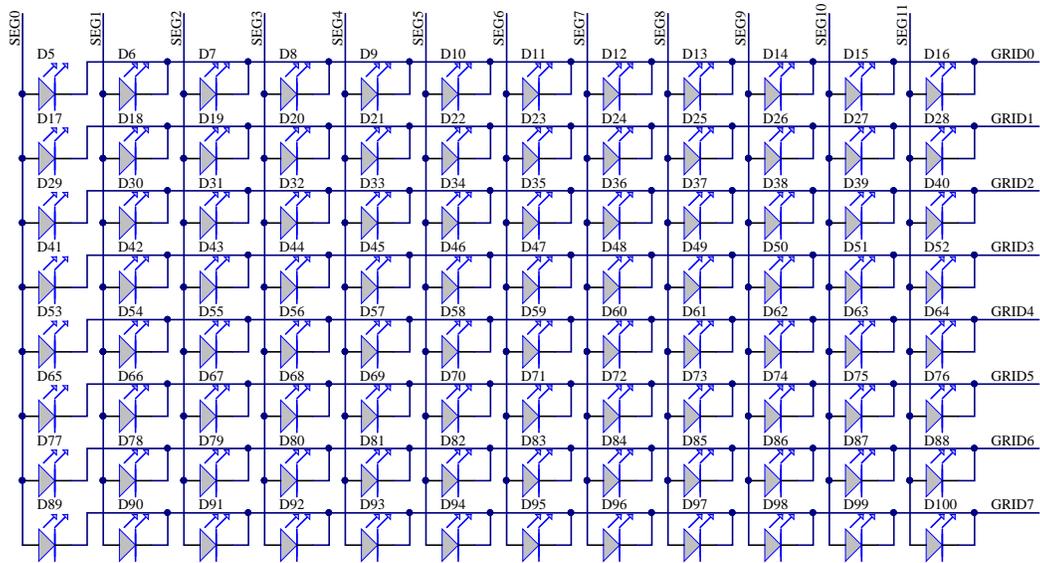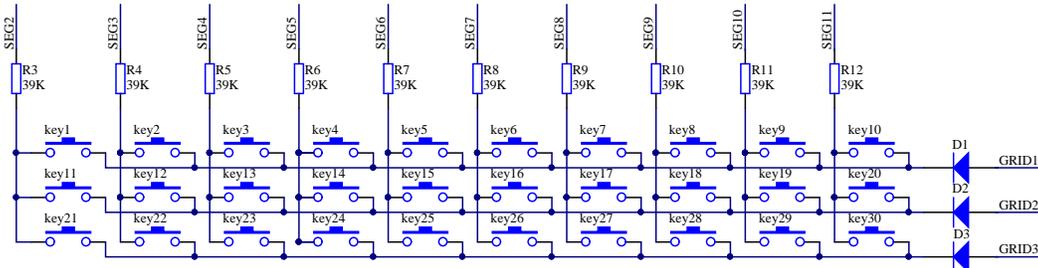

Connect the SEG pin to the anode of the LED and the GRID pin to the cathode of the LED

13 Electrical Characteristics

13.1 Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Supply voltage	VDD	$V_{SS}-0.3V$ to $V_{SS}+6.5$	V
Input Voltage	VIN	$V_{SS}-0.3V$ to $V_{DD}+0.3$	V
Storage Temperature	T _{STG}	-50~+120	°C
Operating Temperature	T _{OTG}	-40~+85	°C


13.2 DC Electrical Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Condition	
						VDD	Condition
VDD	Supply voltage	3.0	5	5.5	V	-	-
IDD	Working current	-	1	2	mA	5	No-load, normal operation, with the SEG/INT terminal set to 0
I _{STB}	Standby current	-	1	10	μA	5	No-load, standby mode
V _{IH}	High-level Input	$0.7V_{DD}$	-	VDD	V	5	SDA,SCL
V _{IL}	Low-level Input	0	-	$0.3V_{DD}$	V	5	SDA,SCL
I _{IL}	Input leakage current	-1	-		μA	-	$V_{IN} = V_{SS}$ or V_{DD}
R _{PL}	Input pull-down resistor	250		-	KΩ	5	SEG2/K1~SEG11/K10, SEG0/A1~SEG1/A0 During the key scan
I _{OL1}	Low-level output current	6	-	-	mA	5	$V_{OL}=0.4V$; SDA
I _{OL2}	SEG source current	6	-	-	mA	5	$V_{OL}=0.4V$,INT Pin
I _{OH1}	SEG source current	-20	-25	-40	mA	5	$V_{OH}=V_{DD}-2V$, (SEG0~SEG11)
		-25	-30	-50	mA		$V_{OH}=V_{DD}-3V$, (SEG0~SEG11)
I _{TOLSEG}	High-level output current tolerance	-	-	5	%	5	$V_{OH}=V_{DD}-3V$, (SEG0~SEG11)
I _{OL3}	GRID sink current	160	200	-	mA	5	$V_{OL}=0.3V$, (GRID0~GRID7pin)
I _{OH2}	GRID source current	-20	-25	-40	mA	5	$V_{OH}=V_{DD}-2V$, (GRID0~GRID3 pin)

13.3 AC Electrical Characteristics


Symbol	Parameter	Min.	Max.	Unit	Test Condition
					Condition
f_{SCL}	Clock frequency	-	400	KHZ	—
t_{BUF}	Bus idle time	1.3	-	μ s	During this period, the bus must remain idle until a new transmission begins
$t_{HD; STA}$	Start-up condition holding time	0.6	-	μ s	After this period, the first clock pulse will be generated
t_{LOW}	SCL low-level time	1.3	-	μ s	It is only related to the repeated START signal
t_{HIGH}	SCL high-level time	0.6	-	μ s	—
$t_{SU; STA}$	Set the time for the Star status	0.6	-	μ s	—
$t_{HD; DAT}$	Data retention time	0	-	μ s	—
$t_{SU; DAT}$	Data setting time	100	-	ns	—
t_r	Rising time	-	0.3	μ s	Periodic sampling
t_f	Decrease time	-	0.3	μ s	Periodic sampling
$t_{SU; STO}$	Stop setting the time for the condition	0.6	-	μ s	—
t_{AA}	The effective clock output time	-	0.9	μ s	—
t_{SP}	Input filter time constant (SDA and SCL pins)	-	50	ns	Noise suppression time

I²C Timing

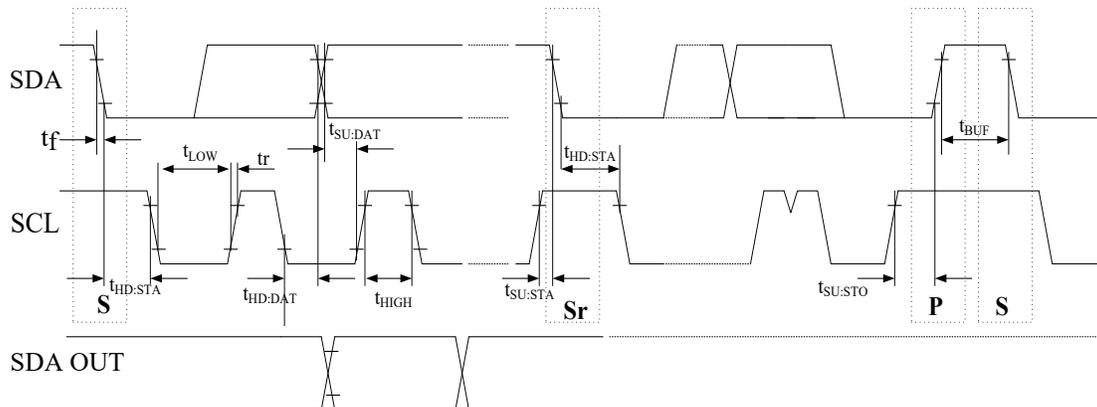

14 Package Information

14.1 SOP24 (300mil) (15.40mm×7.5mm PP=1.27mm)

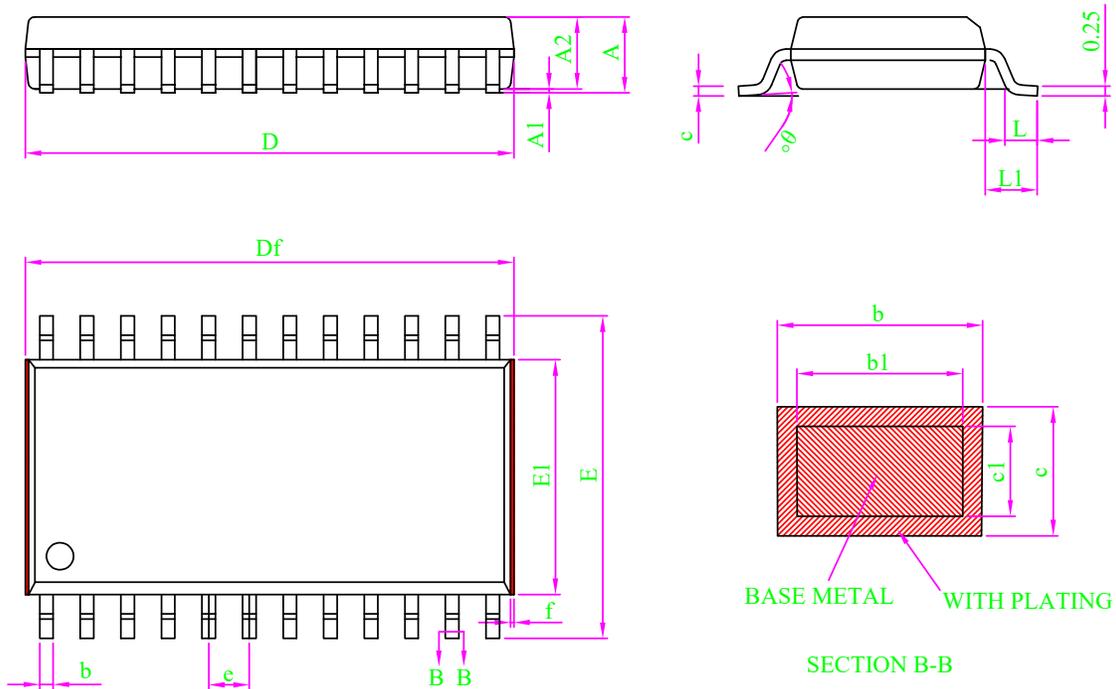

Note:

1. All dimension are in mm.
2. Dim D&E1 does not include plastic flash; Df includes plastic flash(f);
Flash: Plastic residual around body edge after de junk/singulation.
3. Dim b does not include dambar protrusion/intrusion.
4. Plating thickness 0.007mm-0.020mm

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	-	-	2.64
A1	0.10	0.15	0.20
A2	2.24	2.34	2.44
b	0.39	-	0.47
b1	0.38	0.41	0.43
c	0.25	-	0.30
c1	0.24	0.25	0.26
D	15.19	15.29	15.38
Df	15.29	-	15.79
E	10.10	10.30	10.50
E1	7.40	7.50	7.60
e	1.27 BSC		
L	0.71	0.86	1.01
L1	1.30	1.40	1.50
θ	0	-	8°
f	0.05	-	0.20

15 Disclaimer

Warranty and liability — The information provided in this document is believed to be accurate and reliable. However, Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter “the Company”) makes no warranties, express or implied, as to the completeness or suitability of this information for any specific purpose.

In no event shall the Company be liable for any indirect, incidental, or consequential damages, including but not limited to loss of profits, equipment damage, or system failure, arising out of the use of this product or documentation, regardless of the legal theory under which such liability is asserted.

Right to change — The Company reserves the right to modify any information contained herein without prior notice. The latest version of this document is available at:

<https://www.szvinka.com/>

Applicability — This product is not designed or intended for use in life-critical, medical, or safety systems where failure could result in injury or death. The customer shall assume full responsibility for any such use.

Application — All product application descriptions provided herein are intended for illustrative purposes only. The Company makes no representations or warranties, express or implied, regarding the suitability of any specific application without further testing or modification.

The customer is solely responsible for determining whether the Company’s products are appropriate for their intended applications or end customers.

The customer shall ensure proper design practices, implementation safeguards, and operational validation to minimize risks associated with product use.

The Company shall not be held liable for any defects, losses, costs, or damages arising from weaknesses or failures in the customer’s own products or applications, or from the integration or use of third-party products.

Furthermore, the customer shall conduct all necessary testing and validation for any third-party deployment of the Company’s products to avoid potential misuse or associated damages. The Company assumes no liability in this regard.

Commercial terms of sale — Unless otherwise agreed in writing, sales of this product are subject to the Company’s standard terms and conditions of sale. The Company expressly rejects the applicability of the customer’s general terms and conditions.

Export control — This product may be subject to applicable export control regulations. The customer is solely responsible for compliance with such regulations, including obtaining any necessary export licenses.

16 Revision History

No.	Version	Date	Modify the content	Check
1	1.0	2018-08-10	Initial release	YES
2	1.1	2018-10-11	Add reference circuit	YES
3	1.2	2019-03-21	Alignment correction	YES
4	1.3	2025-10-31	Change Description	YES

[1] Please refer to the latest version of this document before starting or finalizing any design.

[2] Since the release of this document, the status or availability of this product may have changed. For the most up-to-date information, please visit:

<https://www.szvinka.com/>