



VKD104CB Datasheet

4-channel touch 1-to-1 output

Rev.1.2

Intellectual Property Statement:

Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter referred to as “the Company”) owns legally registered intellectual property rights in both domestic and international jurisdictions. Any unauthorized use of the Company’s products or patented technologies by individuals or organizations is strictly prohibited.

The Company reserves the right to take legal action against any infringement, and to seek full compensation for damages or unlawful gains.

The Company’s name and trademarks are legally protected and may not be used or imitated without explicit written permission. No implied or express license shall be granted under any circumstances.

1 General Description

The VKD104CB is a 4-channel touch detection chip specifically designed to replace traditional mechanical buttons. It features low power consumption, wide operating voltage range and high detection stability, and is suitable for a variety of application scenarios. The chip is equipped with an internal voltage stabilizing circuit, providing reliable power support for touch detection. The sensitivity of the touch pad can be adjusted through reasonable design.

Supports power-on configuration. Output parameters (level, mode, structure) can be set through IO, and standby mode, 16-second long press reset, and single-key/multi-key mode can be selected. It integrates a special circuit internally, featuring a high power supply rejection ratio, significantly reducing false touches and enhancing operational reliability in harsh environments.

2 Key Features

- Operating voltage: 2.4-5.5V
- Operating current 13.0 μ A@VDD=3.0V
Standby current 2.5 μ A@VDD=3.0V
- Built-in dedicated voltage stabilizing circuit for touch detection
- The response time is approximately 60ms @VDD=3V
- The sensitivity can be adjusted by an external capacitor (1 to 60pF)
- Built-in key debouncing, no need for external software to debouncing again
- The touchless 8S has entered standby mode
- Pins Q0 to Q3 are the output
Output level is selected by the MHL pin as either high level active or low level active
Output mode is selected by the MDT pin as direct output or latched output
Output pin structure is selected by the MOD pin as CMOS output or open-drain output
- Select the touch multi-key mode or single-key mode through the MMS pin
- Select whether to enable the standby mode through the MLP pin
- Select through the MT0S pin whether to enable the 16-second long-press reset function of the key
- After power-on, there is approximately 0.5 seconds of stabilization time during which all functions are disabled. Do not touch the detection point during this period
- Self-calibrate parameters according to environmental changes
- The static electricity of HBM is greater than 5KV
- Available Packages:
SSOP16(150mil)(4.9mm x 3.9mm PP=0.635mm)


3 Product Selection

Part No.	Touch Channel	Working Voltage	Normal Mode/Standby	Output (/ Optional parameter)	Packaging
VKD232C	2	2.4-5.5V	4.0μA/2.5μA(3V)	Direct output Low level effective	SOT23-6L
VKD104CR	2	2.4-5.5V	13.0μA/2.5μA(3V)	Direct/latch high/low level	SOP8
VKD104CR-3H	3	2.4-5.5V	13.0μA/2.5μA(3V)	Directly output a high level and hold for 16 seconds to reset	SOP8
VKD104CC	4	2.4-5.5V	13.0μA/2.5μA(3V)	Direct/latch high/low level multi-key/ single key CMOS/ Open drain, long press to keep output/Long press for 16 seconds to reset	SOP16
VKD104CB	4	2.4-5.5V	13.0μA/2.5μA(3V)	Direct/latch high/low level multi-key/ single key CMOS/ Open drain, long press to keep output/Long press for 16 seconds to reset	SSOP16
VKD104	4	2.4-5.5V	13.0μA/2.5μA(3V)	Direct/latch high/low level multi-key/ single key CMOS/ Open drain, long press to keep output/Long press for 16 seconds to reset	DICE

4 Ordering Information

Part No.	Packaging	Tube Qty	Tray(reel)Qty	Box Qty	Total Qty	Notes
VKD232C	SOT23-6L		3000/reel	30000/box	120000 PCS	
VKD104CR	SOP8	100/tube		10000/box	100000 PCS	
VKD104CR-3H	SOP8	100/tube		10000/box	100000 PCS	
VKD104	DICE		400/tray	2000/box	4000 PCS	
VKD104CC	SOP16	50/tube		5000/box	50000 PCS	
VKD104CB	SSOP16	100/tube		10000/box	100000 PCS	

5 Package Pinout Information(SSOP16)

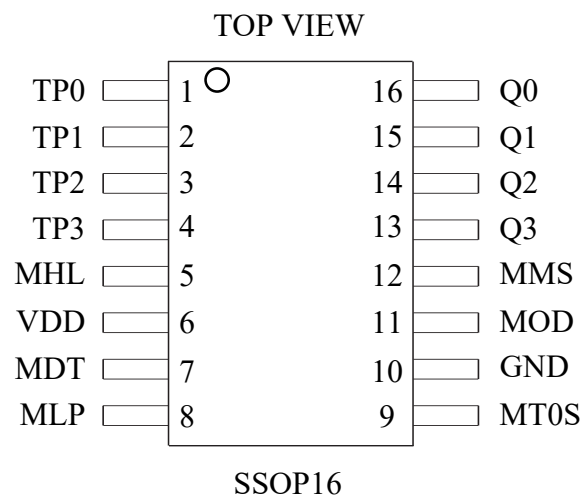

For more information: [Page 11](#)

5.1 VKD104CB/SSOP16 Pin Description

No.	Name	I/O	Function Description
1	TP0	I	Touch input,Connect a small capacitor to ground to fine-tune the sensitivity (1-60pF), and it is most sensitive when not connected
2	TP1	I	Touch input,Connect a small capacitor to ground to fine-tune the sensitivity (1-60pF), and it is most sensitive when not connected
3	TP2	I	Touch input,Connect a small capacitor to ground to fine-tune the sensitivity (1-60pF), and it is most sensitive when not connected
4	TP3	I	Touch input,Connect a small capacitor to ground to fine-tune the sensitivity (1-60pF), and it is most sensitive when not connected
5	MHL	I—RL	Select output level: 1-> low level effective, 0-> high level effective (default)
6	VDD	VDD	Positive power supply
7	MDT	I—RL	Select the output mode: 1-> latch output, 0-> direct output (default)
8	MLP	I—RL	Whether to enable standby mode: 1-> Not enabled, 0-> Enabled (default)
9	MT0S	I—RH	Whether to enable the long-press reset function: 1-> continuous output (default), 0->16S reset
10	GND	GND	Negative power supply
11	MOD	I—RH	Select the output pin structure: 1->CMOS output (default), 0-> open-drain output
12	MMS	I—RH	Select the touch mode: 1-> Multi-key (default), 0-> single-key
13	Q3	O	Touch output
14	Q2	O	Touch output
15	Q1	O	Touch output
16	Q0	O	Touch output


Note:

Input - RH CMOS input with built-in pull-up resistor

Input - RL CMOS input with built-in pull-down resistor

6 Functional Description

6.1 Block Diagram

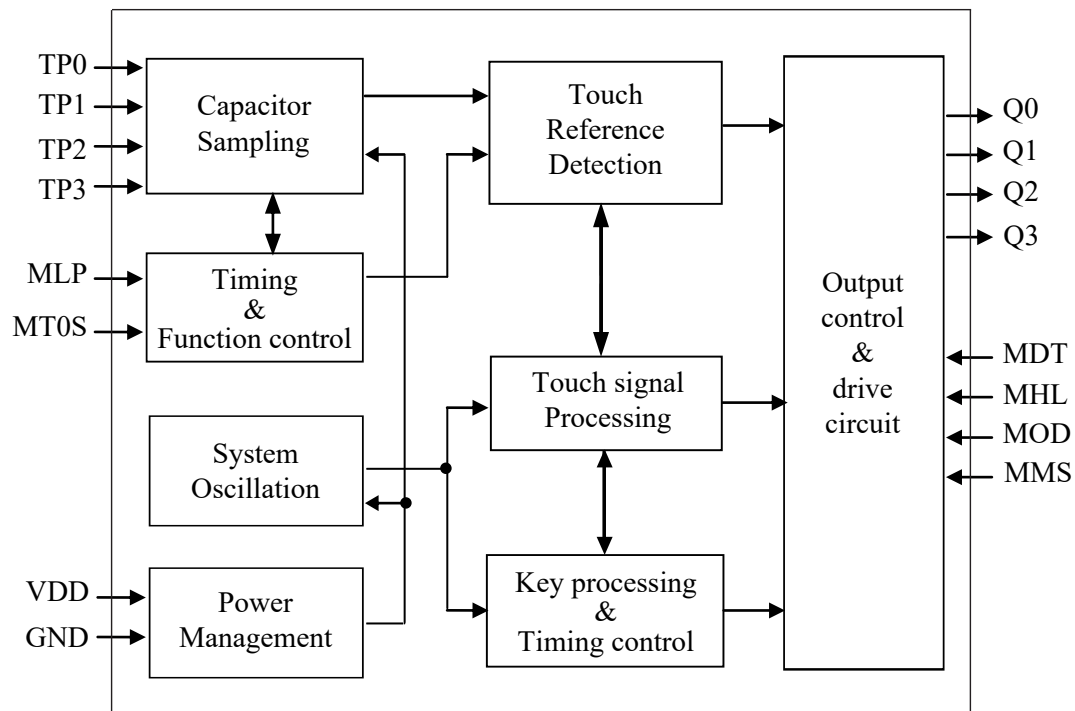

6.2 Output Parameters

The output of VKD104CB is Q0 to Q3, and the output parameters can be configured.

MDT	MOD	MHL	Configure output parameters
NC	NC	NC	Direct CMOS output, high level effective
NC	NC	VDD	Direct CMOS output, low level effective
NC	GND	NC	Direct leakage output, high level effective
NC	GND	VDD	Direct leakage output, low level effective
VDD	NC	NC	Latch CMOS output, power-on output 0
VDD	NC	VDD	Latch CMOS output, power-on output 1
VDD	GND	NC	Latch open drain output, power-on output high resistance, high level effective
VDD	GND	VDD	Latch open drain output, high resistance output upon power-on, and effective at low level

MMS	Select the touch multi-key/single-key mode
NC	Touch multi-key output, supporting simultaneous pressing
GND	Single-key touch output only outputs the key touched first


MT0S	Whether to enable the long-press button reset function
NC	Press and hold the key continuously to output
GND	Press and hold the button for 16 seconds and then reset it

MLP	Whether the standby mode is enabled
NC	Enable standby mode
VDD	Prohibit standby mode


6.3 Operating Mode

The VKD104CB chip has two Operating modes: standby mode and normal mode. The selection is made when the MLP pin is powered on. When the MLP pin is connected to the VDD, the VKD104CB is in normal mode. When the MLP is left floating or connected to GND, VKD104CB enters standby mode. In normal mode, the response speed is relatively fast but the power consumption is high. In standby mode, power consumption is reduced, but the response speed will be slower for the first touch. After that, the response speed will be the same as in normal mode, and it has automatically switched to normal mode for operation. When all keys are released for more than approximately 8 seconds, it will return to standby mode again.

Normal working mode sequence diagram (MLP connected to VDD):

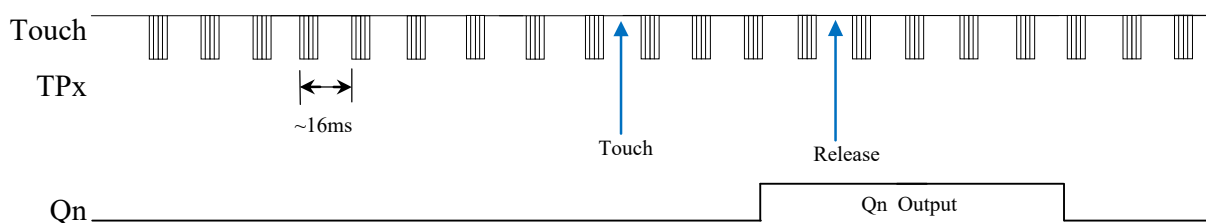

Standby mode timing diagram (MLP left floating or connected to GND) :

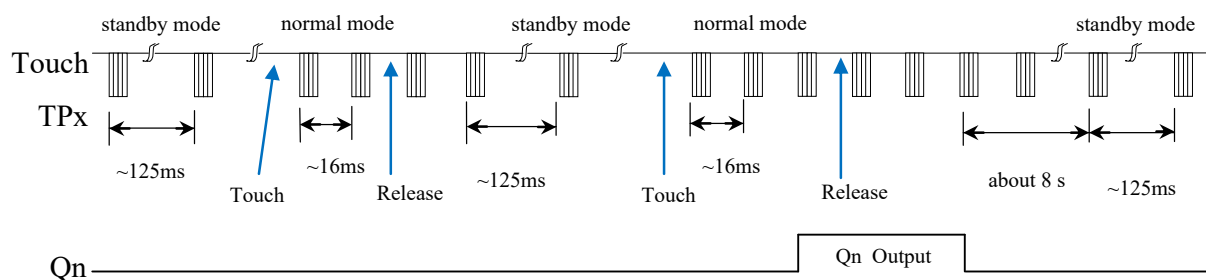

6.4 Sensitivity Adjustment

The sensitivity of VKD104CB is related to the size of the touch PAD, the thickness of the casing, the size of the sensitivity capacitance, etc. The sensitivity should be adjusted according to the actual application of the product. The sensitivity can be adjusted from the following three aspects:

1. Touch the area of the PAD

Under other unchanged conditions, the larger the touch area, the more sensitive it is, but the area must be within the effective area.

2. The thickness of the shell


Under other unchanged conditions, the thinner the casing, the higher the sensitivity; the thicker the casing, the lower the sensitivity. However, the thickness must not exceed the maximum limit.

3. Adjust the small capacitance between the touch foot and the ground


The sensitivity can be fine-tuned by touching the small capacitance of the touch foot to the ground. The larger the capacitance, the lower the sensitivity. The most sensitive is when no capacitance is connected. The sensitivity must be adjusted according to the actual application. Common values: 1-60pF.

7 Application Circuits

It is recommended to use an LDO for power supply

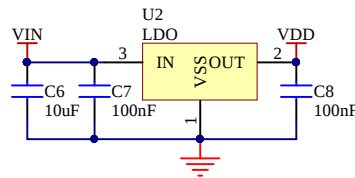

The touch pin is connected in series with a 1K resistor to enhance anti-interference performance. Generally, a 1K resistor is connected in series. The resistance range is 0R to 10K. Depending on the interference situation, increase the resistance value if the interference is severe.

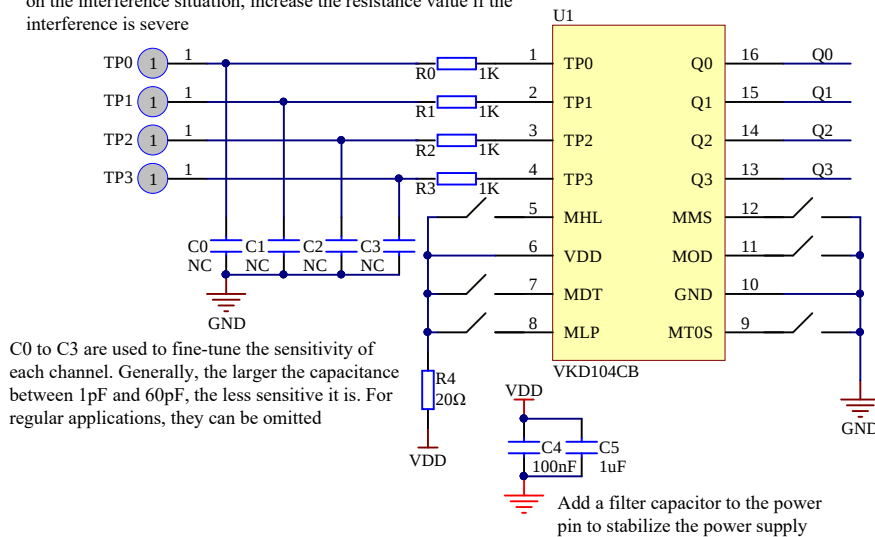

The output of pin Q is configurable

MDT	MOD	MHL	Output function
NC	NC	NC	Direct CMOS output, high level effective (default)
NC	NC	VDD	Direct CMOS output, low level effective
NC	GND	NC	Direct leakage output, high level effective
NC	GND	VDD	Direct leakage output, low level effective
VDD	NC	NC	CMOS latch output, power-on output 0
VDD	NC	VDD	CMOS latch output, power-on output 1
VDD	GND	NC	Open the drain latch output, power on the output high resistance, high level effective
VDD	GND	VDD	Open the drain latch output, output high resistance upon power-on, and be effective at low levels

MMS	Select multi-key/single-key output
NC	Multi-key output, supporting simultaneous pressing (default)
GND	Single-key output, only output the key touched first
MT0S	Whether to enable the long-press button reset function
NC	Long press and keep outputting (default)
GND	Press and hold for 16 seconds to reset
MLP	Select the working mode
NC	Enable standby mode (default)
VDD	Prohibit standby mode

Notes:

1. On the PCB, the length of the line from the touch PAD to the touch pin should be as short as possible, and the touch traces must not be parallel or cross with other lines.
2. The power supply must be stable. Fluctuations, rapid drift or interference in the supply voltage may cause abnormal sensitivity or false detection.
3. The board covering the PCB must not contain any metal or conductive materials, and the same applies to the surface coating.
4. A 0.1uF capacitor must be used between VDD and GND, and the distance from the VDD and GND pins of the chip should be the shortest. It is recommended to add a 20Ω resistor and a 1uF capacitor on the power supply.
5. Fine-tune the sensitivity of capacitors C0-C3(0~60oF) to ensure consistent sensitivity across all channels. The smaller the capacitance value, the more sensitive it is. The highest sensitivity is achieved without connecting capacitors. Sensitivity adjustments must be made based on the actual PCB application. For conventional applications, it is not necessary to connect them. Capacitors with smaller temperature coefficients and greater stability, such as X7R and NPO, must be selected.
6. Resistors R0-R3 are mainly used to effectively prevent radio frequency interference and enhance anti-static capabilities. The common values range from 470R to 1K, with a maximum not exceeding 10K. They can be omitted in conventional applications.

8 Electrical Characteristics

Absolute Maximum Ratings


Parameter	Symbol	Ratings	Unit
Power Voltage	VDD	-0.3~6.0	V
Input Voltage	V _{IN}	GND-0.3~VDD+0.3	V
Storage Temperature	T _{STG}	-50~+125	°C
Operating Temperature	T _{OTG}	-40~+85	°C
Human Body Mode	ESD	≥ 5	KV

8.1 DC Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions (25 °C)	
						VDD	Conditions
Operating voltage	VDD	2.4	3.0	5.5	V	—	—
Operating current	I _{OP}	—	13	—	μA	3.0V	Normal mode
		—	16	—		5.0V	
Standby current	I _{ST}	—	2.5	—	μA	3.0V	Standby mode
		—	5.5	—		5.0V	
Output sink current	I _{IL}	—	8	—	mA	3.0V	V _{OL} =0.6V
		—	15	—		5.0V	
Output source current	I _{OL}	—	-5	—	mA	3.0V	V _{OH} =2.4V
		—	-8	—		5.0V	V _{OH} =4.4V
Input low voltage	V _{IL}	—	—	0.2	VDD	VDD	Input low voltage
Input high voltage	V _{IH}	0.8	—	1	VDD	VDD	Input high voltage
Input the pull-up resistor	R _{PH}	—	30k	—	ohm	3.0V	VDD=3V
Input the pull-down resistor	R _{PL}	—	25k	—	ohm	3.0V	VDD=3V
Output response time	T _R	—	60	—	mS	3.0V	Operating mode
		—	60	—		5.0V	Operating mode
		—	160	—	mS	3.0V	Standby mode
		—	160	—		5.0V	Standby mode

9 Package Information

9.1 SSOP16(4.9mm x 3.9mm PP=0.635m)

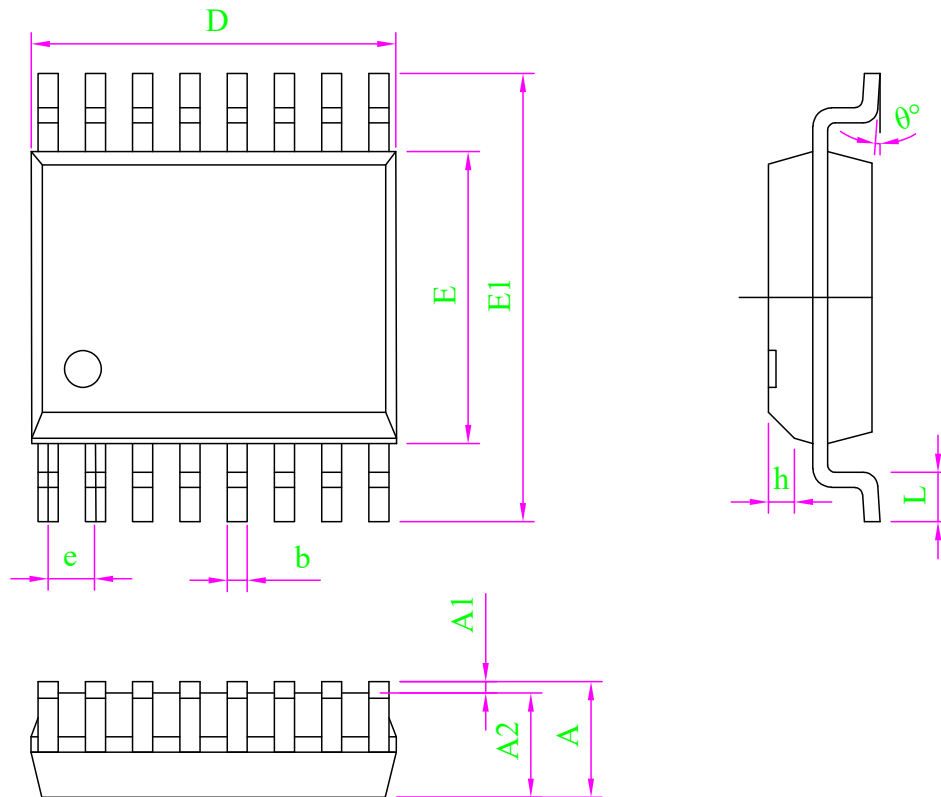

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	-	-	1.75
A1	0.10	0.15	0.25
A2	1.35	1.45	1.55
b	0.23	-	0.31
c	0.19	-	0.25
D	4.80	4.90	5.00
E	3.80	3.90	4.00
E1	5.80	6.00	6.20
e	0.635 BSC		
h	0.30	-	0.50
L	0.50	-	0.80
θ	0	-	8°

10 Disclaimer

Warranty and liability — The information provided in this document is believed to be accurate and reliable. However, Shenzhen Vinka Microelectronics Co., Ltd. (hereinafter “the Company”) makes no warranties, express or implied, as to the completeness or suitability of this information for any specific purpose.

In no event shall the Company be liable for any indirect, incidental, or consequential damages, including but not limited to loss of profits, equipment damage, or system failure, arising out of the use of this product or documentation, regardless of the legal theory under which such liability is asserted.

Right to change — The Company reserves the right to modify any information contained herein without prior notice. The latest version of this document is available at:

<https://www.szvinka.com/>

Applicability — This product is not designed or intended for use in life-critical, medical, or safety systems where failure could result in injury or death. The customer shall assume full responsibility for any such use.

Application — All product application descriptions provided herein are intended for illustrative purposes only. The Company makes no representations or warranties, express or implied, regarding the suitability of any specific application without further testing or modification.

The customer is solely responsible for determining whether the Company’s products are appropriate for their intended applications or end customers.

The customer shall ensure proper design practices, implementation safeguards, and operational validation to minimize risks associated with product use.

The Company shall not be held liable for any defects, losses, costs, or damages arising from weaknesses or failures in the customer’s own products or applications, or from the integration or use of third-party products.

Furthermore, the customer shall conduct all necessary testing and validation for any third-party deployment of the Company’s products to avoid potential misuse or associated damages. The Company assumes no liability in this regard.

Commercial terms of sale — Unless otherwise agreed in writing, sales of this product are subject to the Company’s standard terms and conditions of sale. The Company expressly rejects the applicability of the customer’s general terms and conditions.

Export control — This product may be subject to applicable export control regulations. The customer is solely responsible for compliance with such regulations, including obtaining any necessary export licenses.

11 Revision History

No.	Version	Date	Modify the content	Check
1	1.0	2018-08-10	Original version	YES
2	1.1	2020-02-11	Add reference circuit	YES
3	1.2	2025-11-13	Update version	YES

[1] Consult the recently published documents before starting or finishing the design.

[2] Since the release of this document , the device product status described in this document may have changed and may differ in several cases. The latest product status information can be found on the Internet at <https://www.szvinka.com/>